

Braytron
lighting expert



2019/01
Lighting Unit
Product Catalogue
www.braytron.com

Braytron

lighting expert

ADVANCE | LED Bulb Family

*Ecological
Friendly
Efficient
Low Consumption*



www.braytron.com

BRAYTRON, an international brand specialized in lighting with 15 years' experience in manufacturing and distributing high-tech lighting solutions in four continents.

BRAYTRON is a premium brand developed in consultation with specialist in the field of energy conservation.

The emphasis is to design, manufacture, develop and distribute all type of energy-saving lighting products, mainly focusing on LED lighting solutions.

BRAYTRON products are certified under CE, RoHS, EMC, Dekra, EAC and TÜV. We use high quality LED chips and components supplied by reputed suppliers like Bridgelux, Philips, Sharp, Citizen, Meanwell,

Tridonic and so on. All BRAYTRON products are being manufactured after extensive feasibility, research and testing ensure energy conservation and affordability.

With the growing awareness about LED technology all over the world, BRAYTRON aspires to be among the global pioneers in the advancement and distribution of this technology and pledges to remain updated of all new innovations so as to incorporate the same into our product range.

BRAYTRON operates factories in Romania and Turkey with a modern manufacturing base equipped with high-tech production lines and advanced research and development center.



• **Europe base and Warehouse:**

BRAYTRON SRL
Bulevardul Iuliu Maniu, Nr.616, Sector 6,
Corp B, Etaj 1, Bucharest, Romania
info@braytron.com

• **Factory:**


BRAYTRON LIGHTING CO. LTD.
Cekmekoy, Istanbul, Turkey
info@braytron.com

• **Distribution network:**


In order to provide the best service to its customers BRAYTRON set up its own warehouses and companies at different locations:

For more specific details please visit website;
www.braytron.com



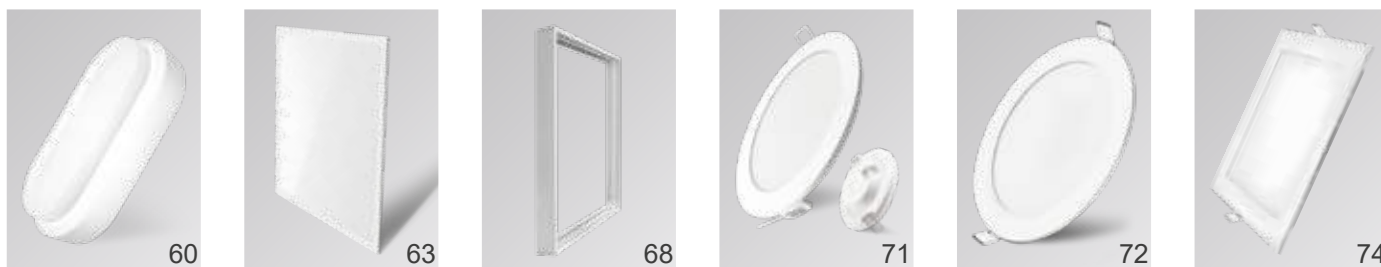

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

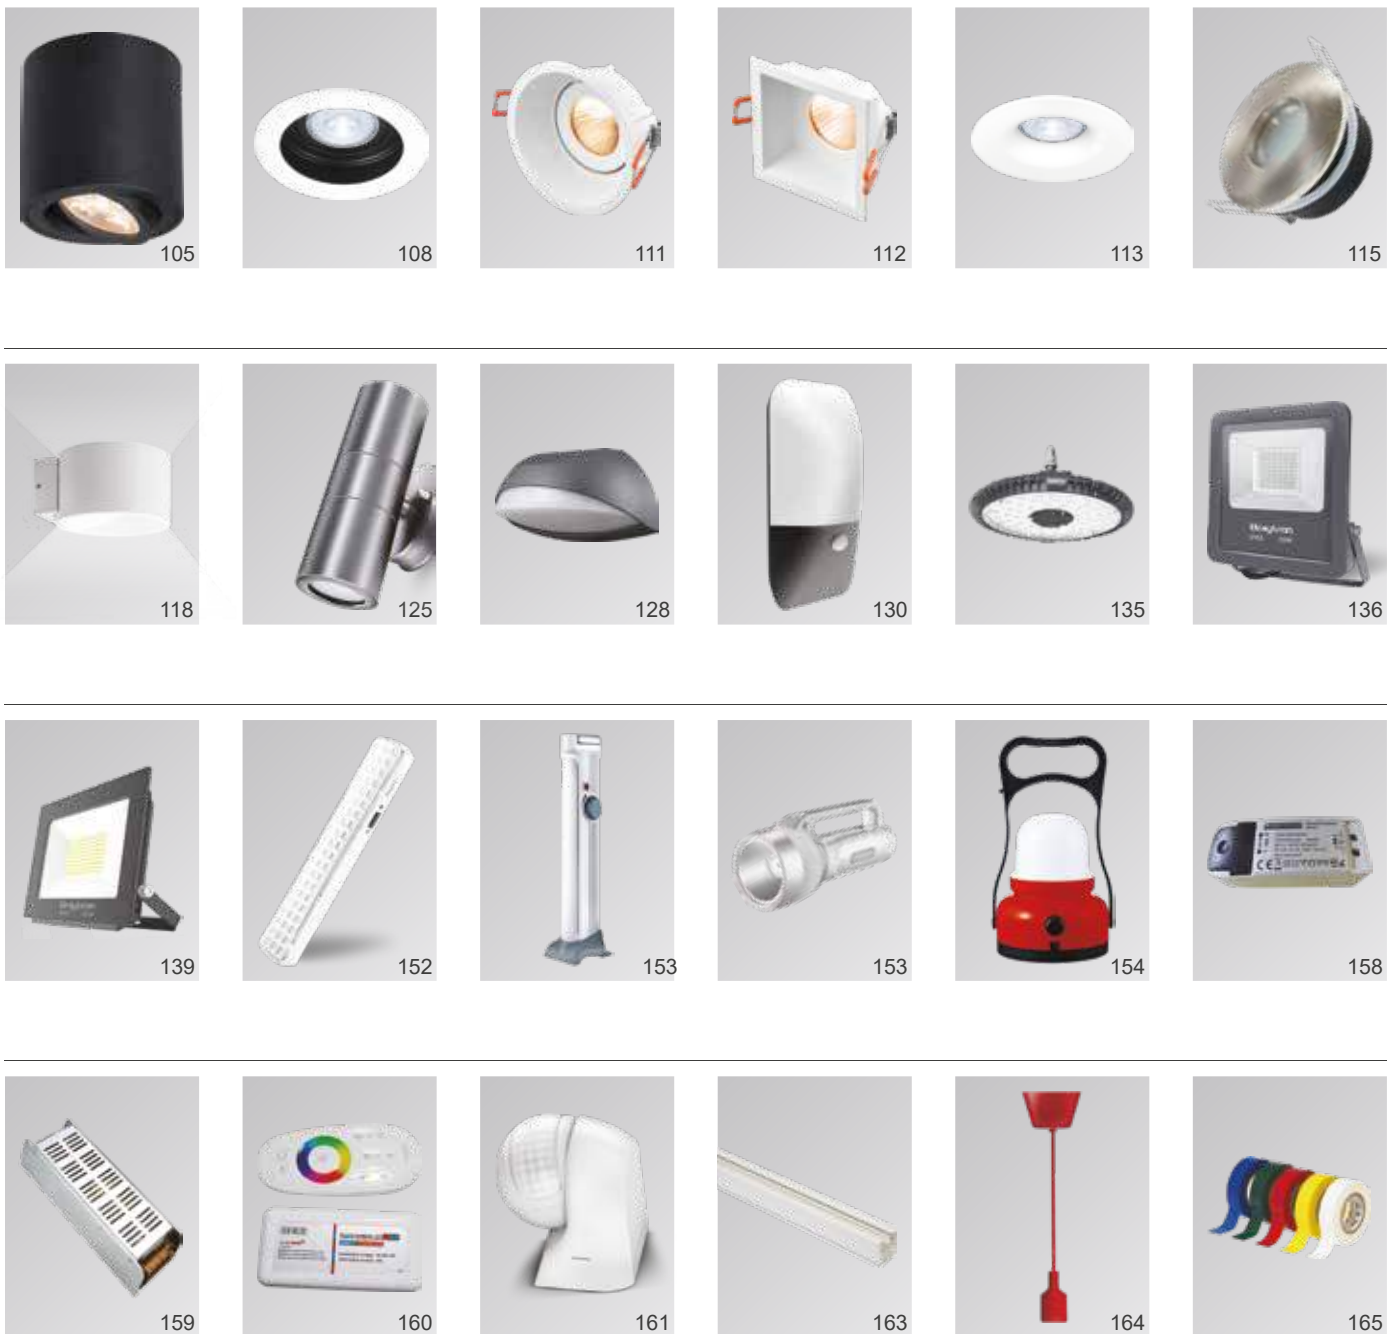

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Braytron

lighting expert

ADVANCE | LED Bulb Family

*Ecological
Friendly
Efficient
Low Consumption*



www.braytron.com







ITEM NO | COLOR TEMP
BA07-00510 | 3000K
BA07-00513 | 6500K

ITEM NO | COLOR TEMP
BA09-00510 | 3000K
BA09-00511 | 4000K
BA09-00513 | 6500K

ITEM NO | COLOR TEMP
BA09-00710 | 3000K
BA09-00713 | 6500K

| Type | C37-TAIL | C37 | C37 |
|------------------------|---------------------------|---------------------------|---------------------------|
| LED Type | SMD | SMD | SMD |
| Socket | E14 | E14 | E14 |
| Watts | 5W | 5W | 7W |
| Equivalent | 35W | 35W | 45W |
| Luminous | 400lm | 400lm | 560lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 220° | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 |





*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BA09-00520 | 3000K |
| BA09-00523 | 6500K |

| | |
|------------------------|---------------------------|
| Type | C37 |
| LED Type | SMD |
| Socket | E27 |
| Watts | 5W |
| Equivalent | 35W |
| Luminous | 400lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 220° |
| Voltage | 220V-240VAC |
| Material | Thermoplastic & Aluminium |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 100 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com






A+

ITEM NO | COLOR TEMP
BA11-00510 | 3000K
BA11-00513 | 6500K

ITEM NO | COLOR TEMP
BA11-00710 | 3000K
BA11-00713 | 6500K

| | | |
|------------------------|---------------------------|---------------------------|
| Type | P45 | P45 |
| LED Type | SMD | SMD |
| Socket | E14 | E14 |
| Watts | 5W | 7W |
| Equivalent | 35W | 45W |
| Luminous | 400lm | 560lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

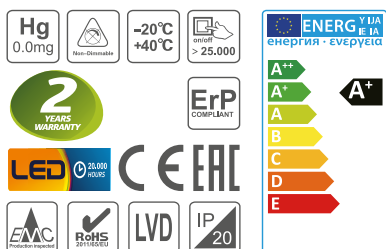




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BA11-00520 | 3000K
 BA11-00523 | 6500K

ITEM NO | COLOR TEMP
 BA11-00720 | 3000K
 BA11-00723 | 6500K

| | | |
|------------------------|---------------------------|---------------------------|
| Type | G45 | G45 |
| LED Type | SMD | SMD |
| Socket | E27 | E27 |
| Watts | 5W | 7W |
| Equivalent | 35W | 45W |
| Luminous | 400lm | 560lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
 BA13-00520 | 3000K
 BA13-00523 | 6500K

ITEM NO | COLOR TEMP
 BA13-00820 | 3000K
 BA13-00823 | 6500K

ITEM NO | COLOR TEMP
 BA13-01020 | 3000K
 BA13-01021 | 4000K
 BA13-01023 | 6500K

| | | | |
|------------------------|---------------------------|---------------------------|---------------------------|
| Type | A55 | A60 | A60 |
| LED Type | SMD | SMD | SMD |
| Socket | E27 | E27 | E27 |
| Watts | 5W | 8W | 10W |
| Equivalent | 35W | 50W | 60W |
| Luminous | 400lm | 630lm | 806lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 220° | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 |

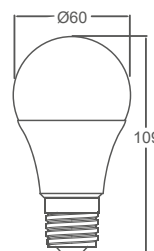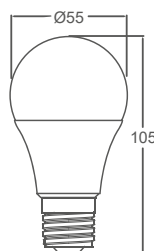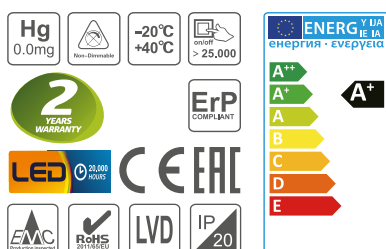

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com







| ITEM NO | COLOR TEMP |
|------------|------------|
| BA13-01220 | 3000K |
| BA13-01221 | 4000K |
| BA13-01223 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA13-01520 | 3000K |
| BA13-01521 | 4000K |
| BA13-01523 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA13-11520 | 3000K |
| BA13-11521 | 4000K |
| BA13-11523 | 6500K |

| Type | A60 | A65 | A70 |
|------------------------|---------------------------|---------------------------|---------------------------|
| LED Type | SMD | SMD | SMD |
| Socket | E27 | E27 | E27 |
| Watts | 12W | 15W | 15W |
| Equivalent | 75W | 85W | 94W |
| Luminous | 1055lm | 1250lm | 1350lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 220° | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 |

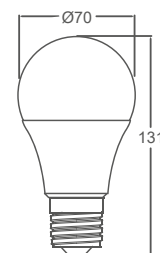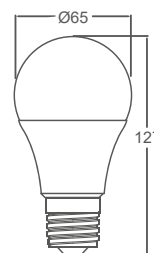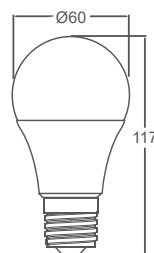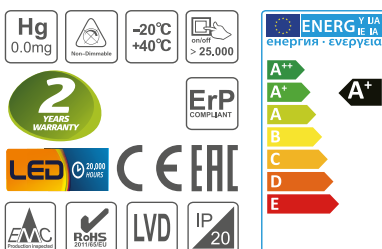




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BA14-50720 | 3000K
BA14-50723 | 6500K

ITEM NO | COLOR TEMP
BA14-01020 | 3000K
BA14-01021 | 4000K

| Type | A60-SENSOR | A60-DIMMABLE |
|------------------------|---------------------------|---------------------------|
| LED Type | SMD | SMD |
| Socket | E27 | E27 |
| Watts | 7W | 10W |
| Equivalent | 40W | 60W |
| Luminous | 470lm | 806lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

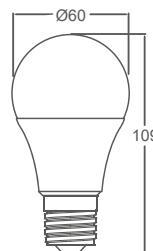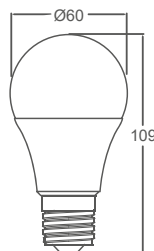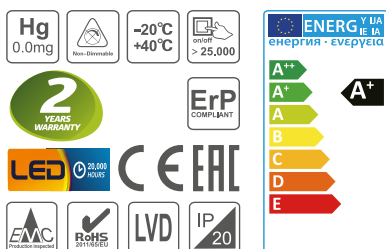

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



A+

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BA13-01820 | 3000K |
| BA13-01823 | 6500K |

| | |
|------------------------|---------------------------|
| Type | A80 |
| LED Type | SMD |
| Socket | E27 |
| Watts | 18W |
| Equivalent | 125W |
| Luminous | 1600lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 220° |
| Voltage | 220V-240VAC |
| Material | Thermoplastic & Aluminium |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 40 |

Hg
0.0mg

Non-Ozonant

-20°C
+40°C

on/off
> 25,000

ENERG Y/лA
енергия · енергетика

A++
A+
A
B
C
D
E

A+

2
YEARS
WARRANTY

ErP
COMPLIANT

LED


CE EAC

EMC

RoHS

LVD

IP 20





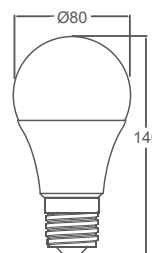


*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|------------|------------|
| BA13-02020 | 3000K | BA13-03020 | 3000K | BA13-04020 | 3000K | BA13-05020 | 3000K |
| BA13-02023 | 6500K | BA13-03023 | 6500K | BA13-04023 | 6500K | BA13-05023 | 6500K |

| Type | T80 | T100 | T120 | T140 |
|------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| LED Type | SMD | SMD | SMD | SMD |
| Socket | E27 | E27 | E27 | E27 |
| Watts | 20W | 30W | 40W | 50W |
| Equivalent | 125W | 175W | 200W | 250W |
| Luminous | 1710lm | 2630lm | 3480lm | 4380lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.5 |
| Beam Angle | 220° | 220° | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC | PC | PC |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 16 | 10 |

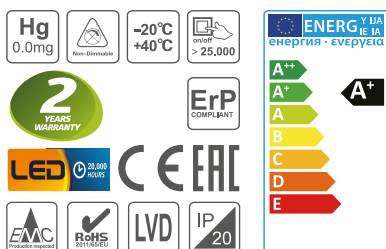


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BA14-30823 | 6500K

| | |
|------------------------|---------------------------|
| Type | A60-Rechargeable |
| LED Type | SMD |
| Socket | E27 |
| Watts(AC) | 8W |
| Watts(DC) | 3W |
| Equivalent | 40W |
| Working Time | 3 Hours |
| Charging Time | 10 Hours |
| Luminous | 500lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 220° |
| Voltage | 220V-240VAC |
| Material | Thermoplastic & Aluminium |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 50 |

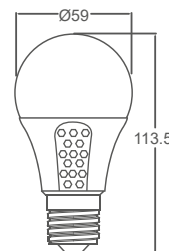




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BA24-00550 | 2700K
 BA24-00551 | 4000K
 BA24-00553 | 6500K

ITEM NO | COLOR TEMP
 BA24-00750 | 2700K
 BA24-00753 | 6500K

| | | |
|------------------------|---------------------------|---------------------------|
| Type | MR16 | MR16 |
| LED Type | SMD | SMD |
| Socket | GU10 | GU10 |
| Watts | 5W | 7W |
| Equivalent | 32W | 45W |
| Luminous | 360lm | 550lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 100° | 100° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

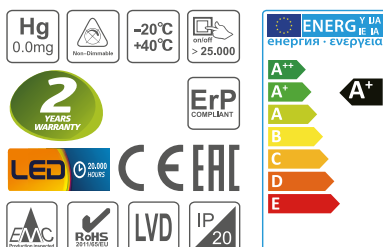


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| ITEM NO | COLOR TEMP |
|------------|------------|
| BA24-00560 | 2700K |
| BA24-00561 | 4000K |
| BA24-00563 | 6500K |

| | |
|------------------------|---------------------------|
| Type | MR16 |
| LED Type | SMD |
| Socket | GU5.3 |
| Watts | 5W |
| Equivalent | 32W |
| Luminous | 360lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 100° |
| Voltage | 220V-240VAC |
| Material | Thermoplastic & Aluminium |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 100 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com







| ITEM NO | COLOR TEMP |
|------------|------------|
| BA25-00550 | 2700K |
| BA25-00551 | 4000K |
| BA25-00553 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA25-00750 | 2700K |
| BA25-00751 | 4000K |
| BA25-00753 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA26-00550 | 2700K |
| BA26-00551 | 4000K |

| Type | MR16 | MR16 | MR16-Dimmable |
|------------------------|---------------------------|---------------------------|---------------------------|
| LED Type | SMD | SMD | SMD |
| Socket | GU10 | GU10 | GU10 |
| Watts | 5W | 7W | 5W |
| Equivalent | 50W | 75W | 50W |
| Luminous | 350lm | 550lm | 350lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 38° | 38° | 38° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 |

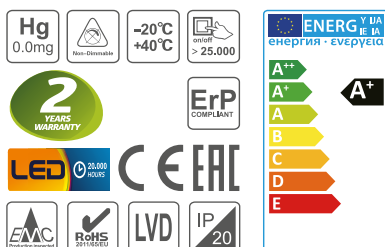

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com






 Dimmable

A+

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA27-00550 | 2700K |
| BA27-00551 | 4000K |
| BA27-00553 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BA27-60650 | 2700K |
| BA27-60651 | 4000K |

| Type | GU10-Glass | GU10-Glass-Dimmable |
|------------------------|-------------|---------------------|
| LED Type | SMD | SMD |
| Socket | GU10 | GU10 |
| Watts | 4.8W | 5.5W |
| Equivalent | 50W | 50W |
| Luminous | 360lm | 360lm |
| CRI | 80 | 80 |
| Power Factor | >0.4 | >0.5 |
| Beam Angle | 38° | 38° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 50 | 50 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
 BA29-30240 | 3000K
 BA29-30243 | 6500K

ITEM NO | COLOR TEMP
 BA29-00340 | 3000K
 BA29-00343 | 6500K

ITEM NO | COLOR TEMP
 BA29-00390 | 3000K
 BA29-00393 | 6500K

| | | | |
|------------------------|-------------|-------------|-------------|
| Type | G4 | G4 | G9-Dimmable |
| LED Type | SMD | SMD | SMD |
| Socket | G4 | G4 | G9 |
| Watts | 1.5W | 2.5W | 2.5W |
| Equivalent | 15W | 20W | 20W |
| Luminous | 140lm | 220lm | 220lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.8 | >0.8 |
| Beam Angle | 360° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Cartron | 500 | 500 | 500 |

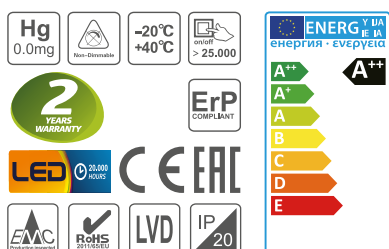

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
 BA29-00590 | 3000K
 BA29-00593 | 6500K

ITEM NO | COLOR TEMP
 BA29-50290 | 2700K
 BA29-50293 | 6500K

ITEM NO | COLOR TEMP
 BA29-50390 | 2700K
 BA29-50393 | 6500K

| | | | |
|------------------------|-------------|-------------|-------------|
| Type | G9 | G9 | G9 |
| LED Type | SMD | SMD | SMD |
| Socket | G9 | G9 | G9 |
| Watts | 5W | 2W | 3W |
| Equivalent | 30W | 24W | 32W |
| Luminous | 340lm | 240lm | 360lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.8 | >0.8 | >0.8 |
| Beam Angle | 300° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Ceramic | Glass | Glass |
| Diffuser | PC | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 200 | 200 | 100 |

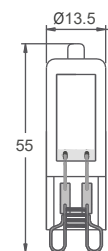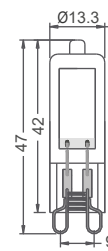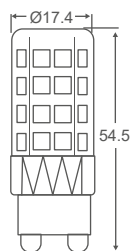



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BA33-01420 | 3000K |
| BA33-01423 | 6500K |

| | |
|------------------------|---------------------------|
| Type | G95 |
| LED Type | SMD |
| Socket | E27 |
| Watts | 14W |
| Equivalent | 80W |
| Luminous | 1150lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 240° |
| Voltage | 220V-240VAC |
| Material | Thermoplastic & Aluminium |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 32 |

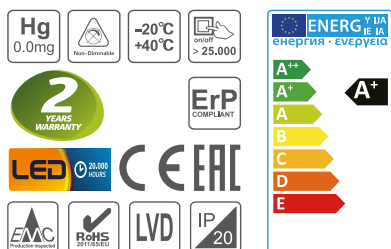

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
BA31-01420 | 3000K

ITEM NO | COLOR TEMP
BA32-01450 | 3000K

ITEM NO | COLOR TEMP
BA32-01460 | 3000K

| | | | |
|------------------------|-------------|-------------|-------------|
| Type | PAR30 | AR111 | AR111 |
| LED Type | SMD | SMD | SMD |
| Socket | E27 | GU10 | G53 |
| Watts | 14W | 14W | 14W |
| Equivalent | 75W | 75W | 75W |
| Luminous | 1050lm | 1220lm | 1050lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 38° | 30° | 30° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium |
| Diffuser | Glass | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 50 | 50 |

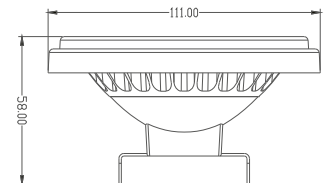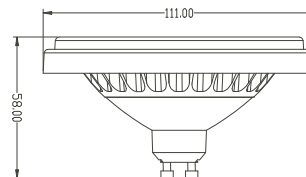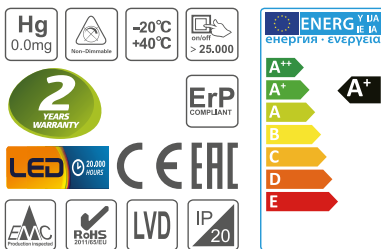




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BA34-00610 | 3000K
 BA34-00613 | 6500K

ITEM NO | COLOR TEMP
 BA34-00920 | 3000K
 BA34-00923 | 6500K

| | | |
|------------------------|---------------------------|---------------------------|
| Type | R50 | R63 |
| LED Type | SMD | SMD |
| Socket | E14 | E27 |
| Watts | 6W | 9W |
| Equivalent | 45W | 60W |
| Luminous | 530lm | 780lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 180° | 180° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Thermoplastic & Aluminium | Thermoplastic & Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

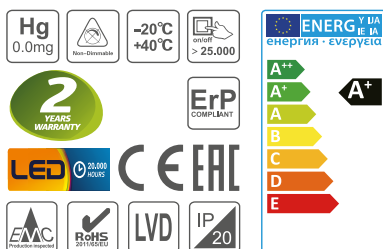

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com





ITEM NO | COLOR TEMP
BA35-00410 | 2700K

ITEM NO | COLOR TEMP
BA36-00410 | 2700K

ITEM NO | COLOR TEMP
BA36-00210 | 2700K

ITEM NO | COLOR TEMP
BA36-60410 | 2700K

| Type | C35-TAIL | C35 | C35 | C35-Dimmable |
|------------------------|-------------|-------------|-------------|--------------|
| LED Type | Filament | Filament | Filament | Filament |
| Socket | E14 | E14 | E14 | E14 |
| Watts | 4W | 4W | 2W | 4W |
| Equivalent | 38W | 38W | 24W | 40W |
| Luminous | 440lm | 440lm | 240lm | 470lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.5 |
| Beam Angle | 360° | 360° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass | Glass |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 | 100 |

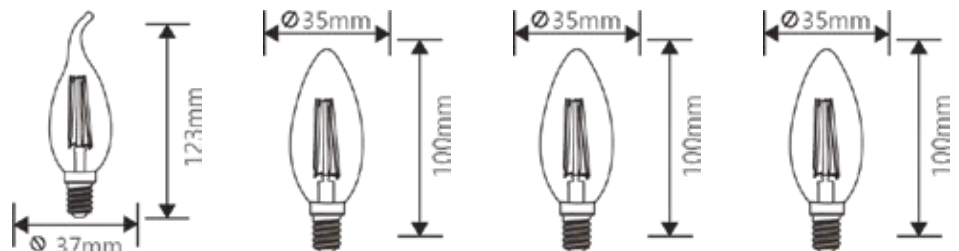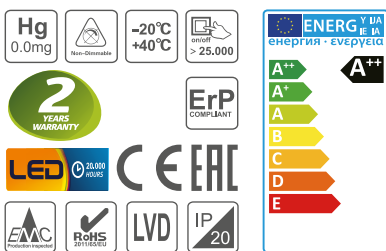





*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BA37-00410 | 2700K

ITEM NO | COLOR TEMP
BA37-00420 | 2700K

| | | |
|------------------------|-------------|-------------|
| Type | P45 | G45 |
| LED Type | Filament | Filament |
| Socket | E14 | E27 |
| Watts | 4W | 4W |
| Equivalent | 38W | 38W |
| Luminous | 440lm | 440lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 |

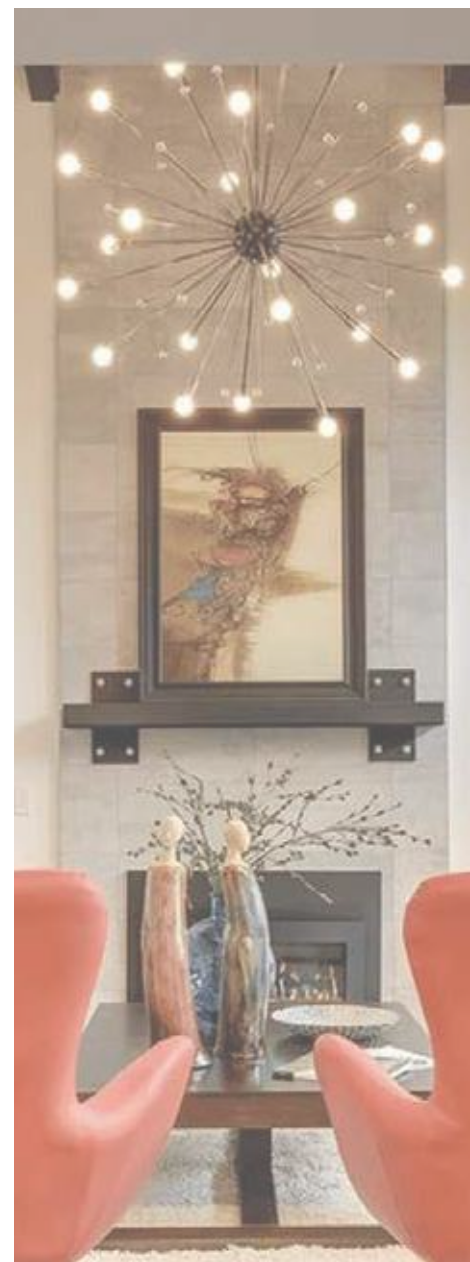

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com






ITEM NO | COLOR TEMP
BA38-00620 | 2700K

ITEM NO | COLOR TEMP
BA38-00720 | 2700K

ITEM NO | COLOR TEMP
BA38-60720 | 2700K

| | | | |
|------------------------|-------------|-------------|--------------|
| Type | A60 | A60 | A60-Dimmable |
| LED Type | Filament | Filament | Filament |
| Socket | E27 | E27 | E27 |
| Watts | 6W | 7W | 7W |
| Equivalent | 50W | 60W | 60W |
| Luminous | 660lm | 806lm | 806lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 360° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 | 100 |

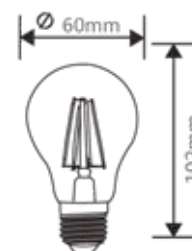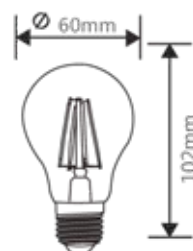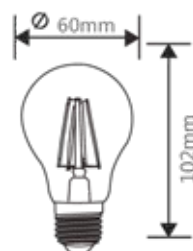

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



 Dimmable

A++

ITEM NO | COLOR TEMP
BA41-60720 | 2700K

| | |
|------------------------|--------------|
| Type | G95-Dimmable |
| LED Type | Filament |
| Socket | E27 |
| Watts | 7W |
| Equivalent | 60W |
| Luminous | 806lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 360° |
| Voltage | 220V-240VAC |
| Material | Glass |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |



Hg
0.0mg

Non-halogen

-20°C
+40°C

Lifespan
> 25,000

ErP
COMPLIANT

LED
0.0500
10000

CE EAC


EMC
Restriction compliance

RoHS
2011/65/EU

LVD

IP
20

ENERGY LABEL
A++
A+
A
B
C
D
E

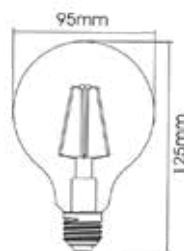



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BA35-30413 | 6500K

ITEM NO | COLOR TEMP
BA36-30413 | 6500K

| | | |
|------------------------|-------------|-------------|
| Type | C35T-Soft | C35-Soft |
| LED Type | Filament | Filament |
| Socket | E14 | E14 |
| Watts | 4W | 4W |
| Equivalent | 35W | 35W |
| Luminous | 400lm | 400lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 |






*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BA37-30413 | 6500K

ITEM NO | COLOR TEMP
BA37-30423 | 6500K

| | | |
|------------------------|-------------|-------------|
| Type | P45-Soft | G45-Soft |
| LED Type | Filament | Filament |
| Socket | E14 | E27 |
| Watts | 4W | 4W |
| Equivalent | 35W | 35W |
| Luminous | 400lm | 400lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

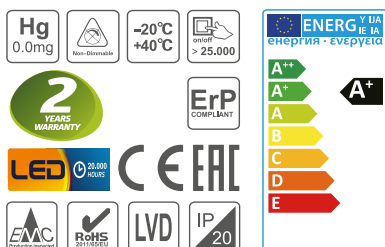




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BA38-30720 | 3000K
 BA38-30723 | 6500K

ITEM NO | COLOR TEMP
 BA38-90720 | 3000K
 BA38-90723 | 6500K

| Type | A60-Soft | A60-Soft-Dimmable |
|------------------------|-------------|-------------------|
| LED Type | Filament | Filament |
| Socket | E27 | E27 |
| Watts | 7W | 7W |
| Equivalent | 60W | 60W |
| Luminous | 806lm | 806lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 |

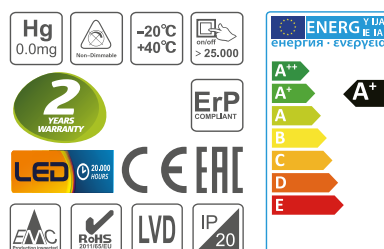

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BA41-30720 | 3000K |
| BA41-30723 | 6500K |

| | |
|------------------------|-------------|
| Type | G95-Soft |
| LED Type | Filament |
| Socket | E27 |
| Watts | 7W |
| Equivalent | 60W |
| Luminous | 806lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 360° |
| Voltage | 220V-240VAC |
| Material | Glass |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

Hg
0.0mg

RoHS
2011/65/EU

-20°C
+40°C

Smart
> 25,000

ENERGY STAR
energy - everyday

2
YEARS
WARRANTY

ErP
COMPLIANT

LED
0.25W
10000 HOURS

CE ENEC


EMC

RoHS
2011/65/EU

LVD

IP
20

| |
|-----|
| A++ |
| A+ |
| A |
| B |
| C |
| D |
| E |








ITEM NO | COLOR TEMP
BB36-00410 | 2200K

ITEM NO | COLOR TEMP
BB36-60410 | 2200K

| Type | C35-Amber | C35-Dimmable-Amber |
|------------------------|-------------|--------------------|
| LED Type | Filament | Filament |
| Socket | E14 | E14 |
| Watts | 4W | 4W |
| Equivalent | 32W | 32W |
| Luminous | 360lm | 360lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 100 |

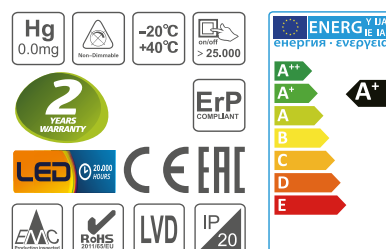




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com






ITEM NO | COLOR TEMP
BB37-00410 | 2200K

ITEM NO | COLOR TEMP
BB37-00420 | 2200K

| | | |
|------------------------|-------------|-------------|
| Type | P45 | G45 |
| LED Type | Filament | Filament |
| Socket | E14 | E27 |
| Watts | 4W | 4W |
| Equivalent | 32W | 32W |
| Luminous | 360lm | 360lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 220° | 220° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 100 | 100 |

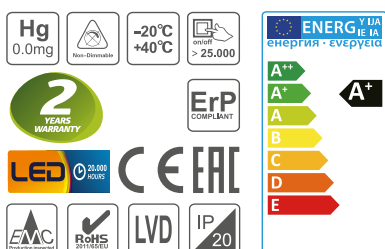

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com


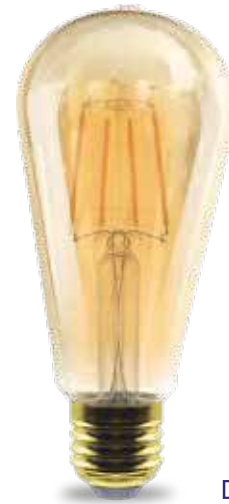
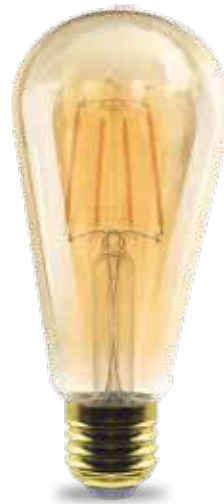
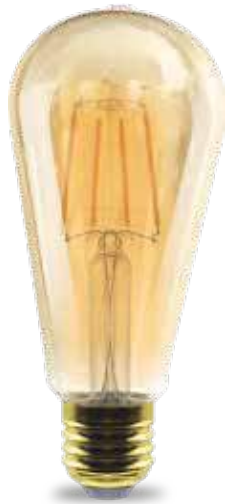


ITEM NO | COLOR TEMP
BA46-00420 | 2200K

ITEM NO | COLOR TEMP
BA46-00620 | 2200K

ITEM NO | COLOR TEMP
BA46-60620 | 2200K

| Type | ST64-Amber | ST64-Amber | ST64-Dimmable-Amber |
|------------------------|-------------|-------------|---------------------|
| LED Type | Filament | Filament | Filament |
| Socket | E27 | E27 | E27 |
| Watts | 4W | 6W | 6W |
| Equivalent | 32W | 42W | 42W |
| Luminous | 360lm | 515lm | 515lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 360° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 50 | 50 | 50 |

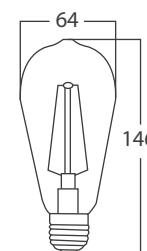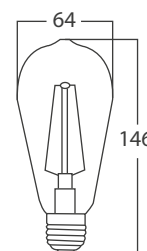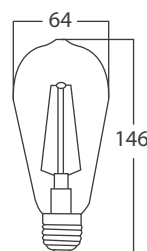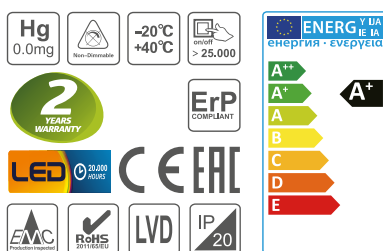

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
BB47-00420 | 2200K


ITEM NO | COLOR TEMP
BB47-00620 | 2200K

ITEM NO | COLOR TEMP
BB47-60620 | 2200K

| | | | |
|------------------------|-------------|-------------|--------------|
| Type | G95 | G95 | G95-Dimmable |
| LED Type | Filament | Filament | Filament |
| Socket | E27 | E27 | E27 |
| Watts | 4W | 6W | 6W |
| Equivalent | 32W | 42W | 42W |
| Luminous | 360lm | 515lm | 515lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 360° | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 20 |


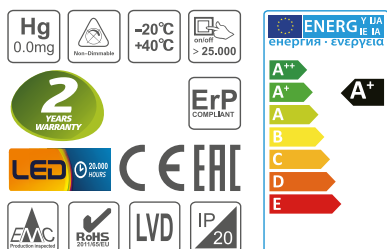


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

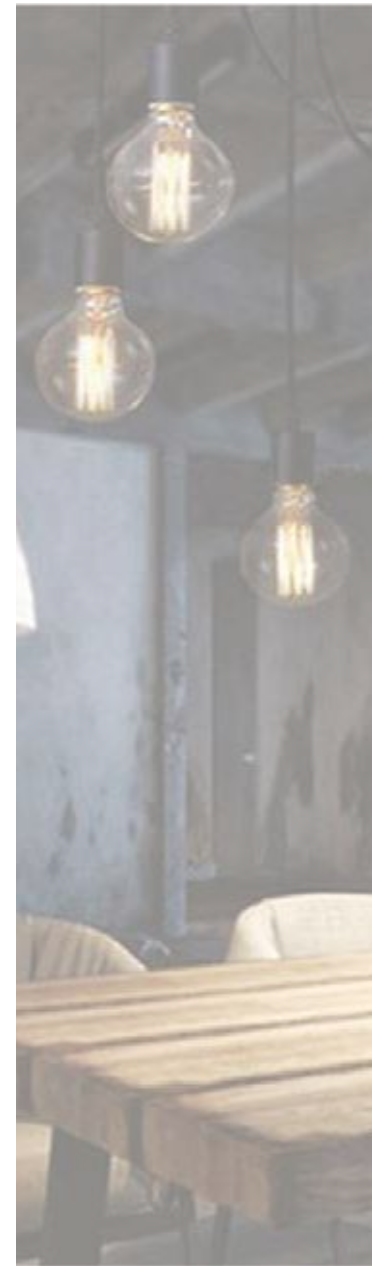


ITEM NO | COLOR TEMP
BB48-00620 | 2200K

| | |
|------------------------|-------------|
| Type | G125 |
| LED Type | Filament |
| Socket | E27 |
| Watts | 6W |
| Equivalent | 42W |
| Luminous | 515lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 300° |
| Voltage | 220V-240VAC |
| Material | Glass |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

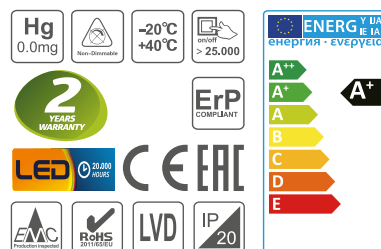

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



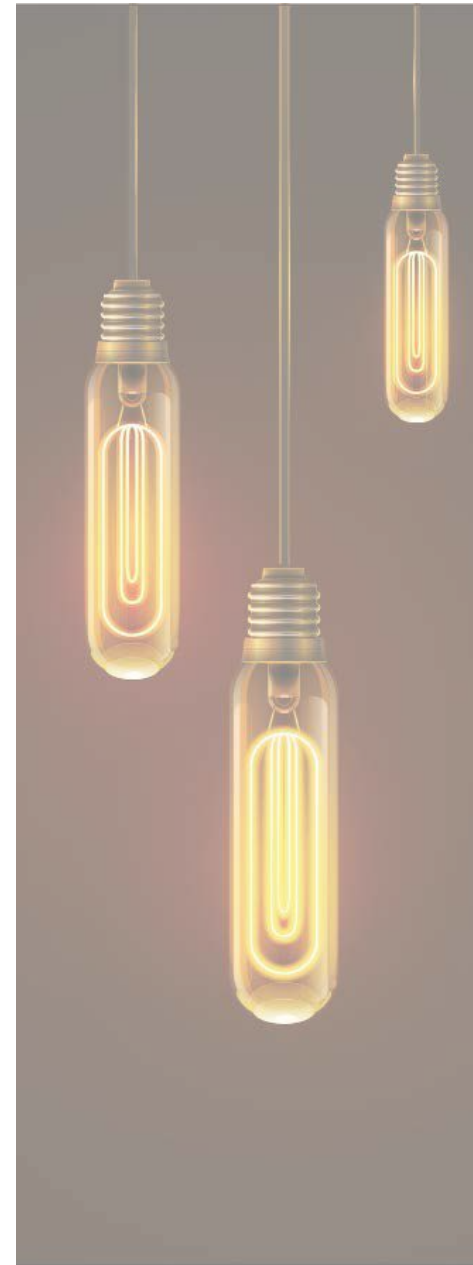


A+

ITEM NO | COLOR TEMP
BB62-60620 | 2200K

ITEM NO | COLOR TEMP
BB62-00820 | 2200K

| | | |
|------------------------|------------------|-------------|
| Type | T30-200-Dimmable | T30-300 |
| LED Type | Filament | Filament |
| Socket | E27 | E27 |
| Watts | 6W | 8W |
| Equivalent | 42W | 60W |
| Luminous | 515lm | 790lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 360° | 360° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 20 | 20 |

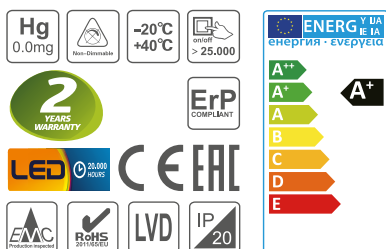

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com







ITEM NO | COLOR TEMP
BB50-00420 | 2200K

ITEM NO | COLOR TEMP
BB53-00420 | 2200K

ITEM NO | COLOR TEMP
BB55-00420 | 2200K

| | | | |
|------------------------|-------------|-------------|-------------|
| Type | DM110 | CR110 | HR95 |
| LED Type | Filament | Filament | Filament |
| Socket | E27 | E27 | E27 |
| Watts | 4W | 4W | 4W |
| Luminous | 240lm | 240lm | 240lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 300° | 300° | 300° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 20 |


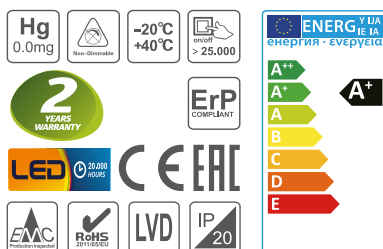


*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | | | | | | | |
|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
| ITEM NO BA35-00410 | COLOR TEMP 2700K | ITEM NO BA35-00410 | COLOR TEMP 2700K | ITEM NO BA35-00410 | COLOR TEMP 2700K | ITEM NO BA35-00410 | COLOR TEMP 2700K |
|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|

| Type | FL95 | WL100 | BL125 | LM125 |
|------------------------|-------------|-------------|-------------|-------------|
| LED Type | Filament | Filament | Filament | Filament |
| Socket | E27 | E27 | E27 | E27 |
| Watts | 4W | 4W | 4W | 4W |
| Luminous | 240lm | 240lm | 240lm | 240lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.5 |
| Beam Angle | 300° | 300° | 300° | 300° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass | Glass |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 20 | 20 |

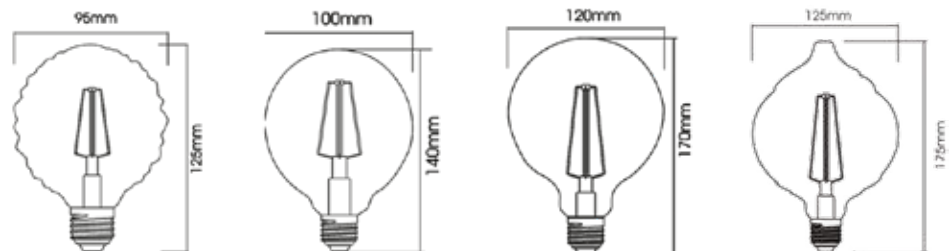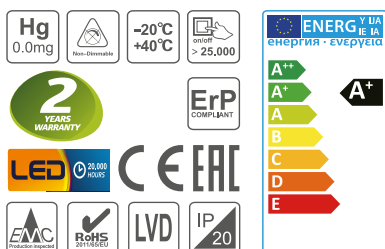

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com









| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-02420 | 3000K |
| BB01-02421 | 4000K |
| BB01-02423 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-12420 | 3000K |
| BB01-12421 | 4000K |
| BB01-12423 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-42420 | 3000K |
| BB01-42421 | 4000K |
| BB01-42423 | 6500K |

| LED Type | SMD | SMD | SMD |
|------------------------|-------------|-------------|-------------|
| Body color | White | Black | Red |
| Socket | E27 | E27 | E27 |
| Watts | 24W | 24W | 24W |
| Luminous | 1900lm | 1900lm | 1900lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 8 | 8 | 8 |

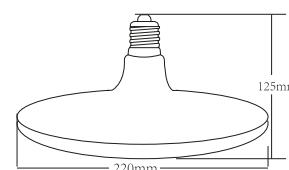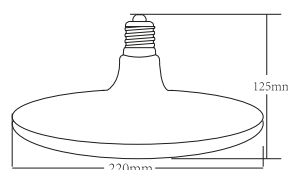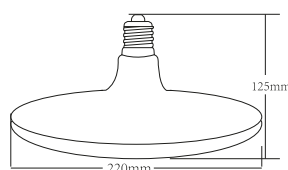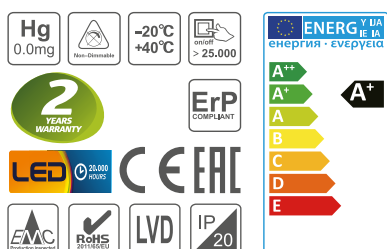




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-52420 | 3000K |
| BB01-52421 | 4000K |
| BB01-52423 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-62420 | 3000K |
| BB01-62421 | 4000K |
| BB01-62423 | 6500K |

| | | |
|-------------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body color | Green | Blue |
| Socket | E27 | E27 |
| Watts | 24W | 24W |
| Luminous | 1900lm | 1900lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 8 | 8 |

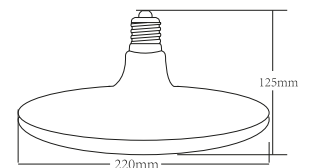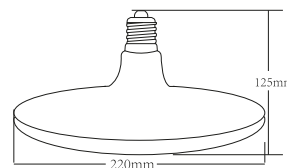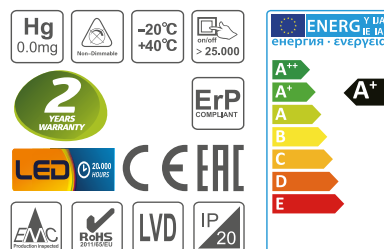

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com






| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-03220 | 3000K |
| BB01-03221 | 4000K |
| BB01-03223 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-13220 | 3000K |
| BB01-13221 | 4000K |
| BB01-13223 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BB01-43220 | 3000K |
| BB01-43221 | 4000K |
| BB01-43223 | 6500K |

| LED Type | SMD | SMD | SMD |
|------------------------|-------------|-------------|-------------|
| Body color | White | Black | Red |
| Socket | E27 | E27 | E27 |
| Watts | 32W | 32W | 32W |
| Luminous | 2700lm | 2700lm | 2700lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Cartron | 8 | 8 | 8 |

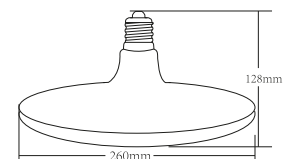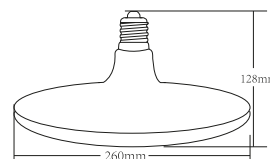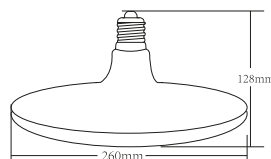



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BB01-53220 | 3000K
 BB01-53221 | 4000K
 BB01-53223 | 6500K

ITEM NO | COLOR TEMP
 BB01-63220 | 3000K
 BB01-63221 | 4000K
 BB01-63223 | 6500K

| | | |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body color | Green | Blue |
| Socket | E27 | E27 |
| Watts | 32W | 32W |
| Luminous | 2700lm | 2700lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 8 | 8 |

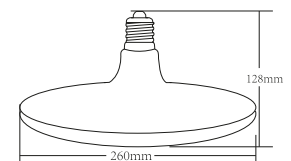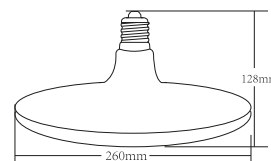



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



A+

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|
| BA52-00680 | 3000K | BA52-01280 | 3000K | BA52-01580 | 3000K |
| BA52-00681 | 4000K | BA52-01281 | 4000K | BA52-01581 | 4000K |
| BA52-00683 | 6500K | BA52-01283 | 6500K | BA52-01583 | 6500K |

| Type | T8/0.6mt | T8/1.2mt | T8-/1.5mt |
|------------------------|-------------|-------------|-------------|
| Connection | Double Side | Double Side | Double Side |
| LED Type | SMD | SMD | SMD |
| Socket | G13 | G13 | G13 |
| Watts | 9W | 18W | 24W |
| Luminous | 900lm | 1800lm | 2400lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 25 | 25 | 25 |

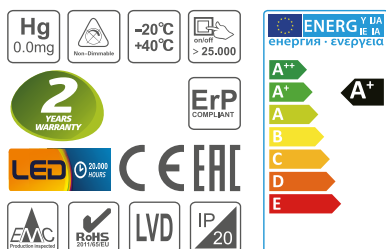

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




100Lm/w



| | | | | | |
|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BA52-20680 | 3000K | BA52-21280 | 3000K | BA52-21580 | 3000K |
| BA52-20681 | 4000K | BA52-21281 | 4000K | BA52-21581 | 4000K |
| BA52-20683 | 6500K | BA52-21283 | 6500K | BA52-21583 | 6500K |

| Type | T8/0.6mt | T8/1.2mt | T8/1.5mt |
|------------------------|-------------|-------------|-------------|
| Connection | Single Side | Single Side | Single Side |
| LED Type | SMD | SMD | SMD |
| Socket | G13 | G13 | G13 |
| Watts | 9W | 18W | 24W |
| Luminous | 900lm | 1800lm | 2400lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 25 | 25 | 25 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




100Lm/w

A+

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|
| BA52-10680 | 3000K | BA52-11280 | 3000K | BA52-11580 | 3000K |
| BA52-10681 | 4000K | BA52-11281 | 4000K | BA52-11581 | 4000K |
| BA52-10683 | 6500K | BA52-11283 | 6500K | BA52-11583 | 6500K |


| Type | T8/0.6mt | T8/1.2mt | T8/1.5mt |
|------------------------|-------------|-------------|-------------|
| Connection | Single Side | Single Side | Single Side |
| LED Type | SMD | SMD | SMD |
| Socket | G13 | G13 | G13 |
| Watts | 9W | 18W | 24W |
| Luminous | 900lm | 1800lm | 2400lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Glass | Glass | Glass |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 25 | 25 | 25 |

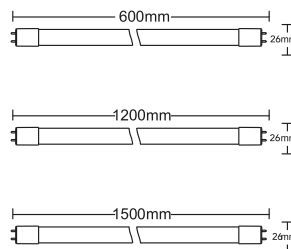

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com








- **T5 LED WALL & CEILING LAMPS**
- **T8 LED WALL & CEILING LAMPS**
- **T8 LED WATERPROOF CEILING & WALL LAMPS**
- **T8 WATERPROOF LAMPS**

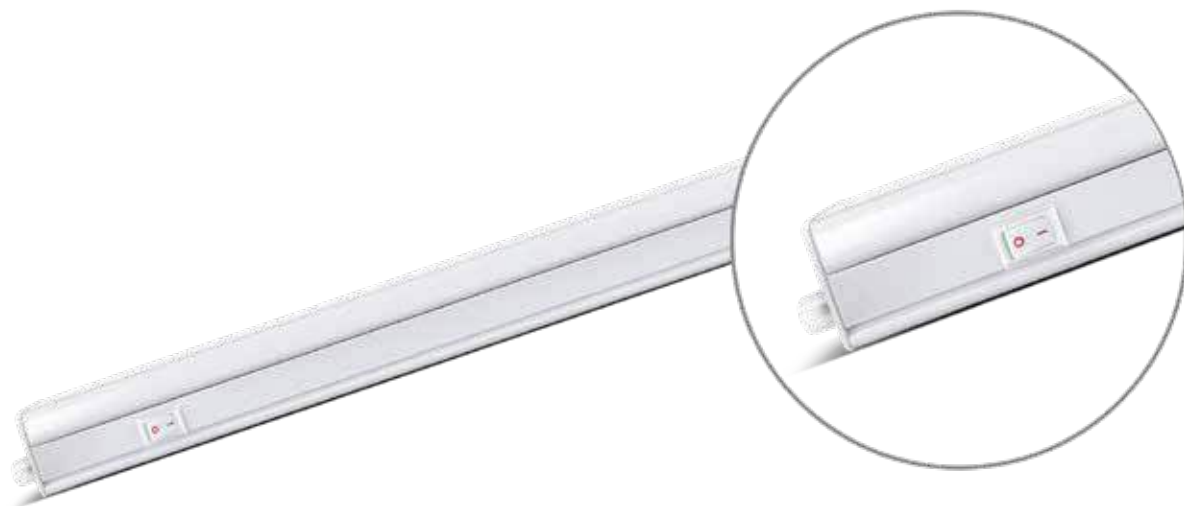

| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BN10-00400 | 3000K | BN10-00700 | 3000K | BN10-01100 | 3000K | BN10-01400 | 3000K |
| BN10-00410 | 4000K | BN10-00710 | 4000K | BN10-01110 | 4000K | BN10-01410 | 4000K |
| BN10-00430 | 6500K | BN10-00730 | 6500K | BN10-01130 | 6500K | BN10-01430 | 6500K |

| | | | | |
|-------------------------------|-------------|-------------|-------------|-------------|
| Type | Ledline | Ledline | Ledline | Ledline |
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | White | White | White | White |
| Watts | 4W | 7W | 11W | 14W |
| Luminous | 310lm | 560lm | 820lm | 1100lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.5 |
| Beam Angle | 110° | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PC | PC | PC | PC |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 30 | 30 | 30 | 30 |





*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
 BN20-00613 | 4000K
 BN20-00633 | 6500K

ITEM NO | COLOR TEMP
 BN20-01213 | 4000K
 BN20-01233 | 6500K

| | | |
|------------------------|-------------|-------------|
| Type | Proline-P | Proline-P |
| LED Type | SMD | SMD |
| Body Color | Silver | Silver |
| Watts | 20W | 40W |
| Luminous | 1600lm | 3200lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.9 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 10 | 10 |






*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BN18-00603 | 3000K | BN18-01203 | 3000K | BN19-00600 | 3000K | BN19-01200 | 3000K |
| BN18-00633 | 6500K | BN18-01233 | 6500K | BN19-00610 | 4000K | BN19-01210 | 4000K |
| | | | | BN19-00630 | 6500K | BN19-01230 | 6500K |


| Type | Proline-PS | Proline-PS | Proline-D | Proline-D |
|------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | Silver | Silver | White | White |
| Watts | 18W | 36W | 18W | 36W |
| Luminous | 1500lm | 2900lm | 1500lm | 2900lm |
| CRI | 70 | 70 | 70 | 70 |
| Power Factor | >0.5 | >0.9 | >0.5 | >0.9 |
| Beam Angle | 110° | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PC | PC | PC | PC |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 10 | 10 | 10 | 10 |

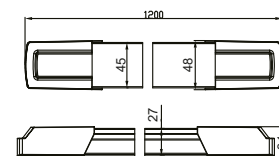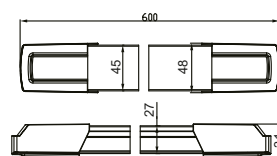

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Features




- Built-in Driver
- Low Energy Consumption
- UGR<19
- Easy & Quick Installation
- Suitable For Indoor & Outdoor Application

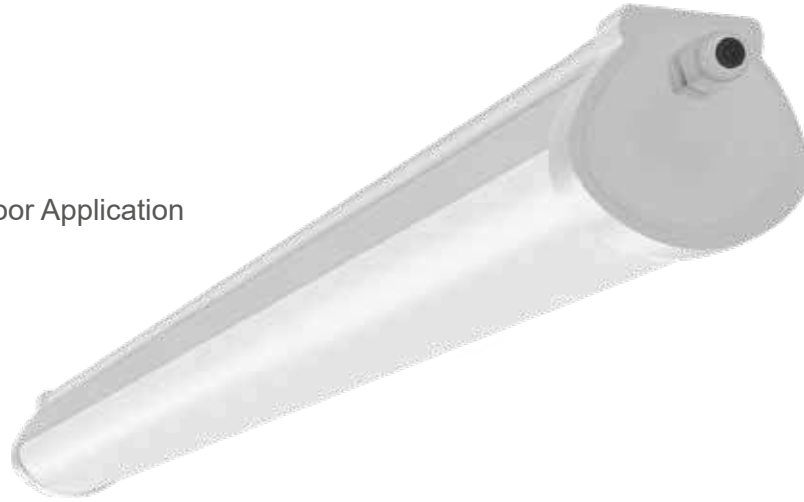

Powered by **SAMSUNG LED**

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|
| BT04-00600 | 3000K | BT04-01200 | 3000K | BT04-01500 | 3000K |
| BT04-00610 | 4000K | BT04-01210 | 4000K | BT04-01510 | 4000K |
| BT04-00630 | 6500K | BT04-01230 | 6500K | BT04-01530 | 6500K |

| Type | Proline-IPT/0.6mt | Proline-IPT/1.2mt | Proline-IPT/1.5mt |
|------------------------|-------------------|-------------------|-------------------|
| LED Type | SMD | SMD | SMD |
| Body Color | Grey | Grey | Grey |
| Watts | 18W | 36W | 48W |
| Luminous | 1780lm | 3420lm | 4360lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 180° | 180° | 180° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 10 | 10 | 10 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




| ITEM NO | COLOR TEMP |
|------------|------------|
| BT02-00600 | 3000K |
| BT02-00610 | 4000K |
| BT02-00630 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT02-01200 | 3000K |
| BT02-01210 | 4000K |
| BT02-01230 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT02-01500 | 3000K |
| BT02-01510 | 4000K |
| BT02-01530 | 6500K |

| Type | Proline-IP/0.6mt | Proline-IP/1.2mt | Proline-IP/1.5mt |
|------------------------|------------------|------------------|------------------|
| LED Type | SMD | SMD | SMD |
| Body Color | White | White | White |
| Watts | 18W | 36W | 45W |
| Luminous | 1500lm | 2900lm | 3700lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.5 | >0.9 | >0.9 |
| Beam Angle | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 10 | 10 | 10 |

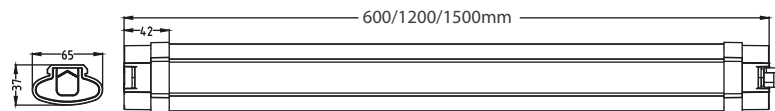


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| | | | |
|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BT03-00600 | 3000K | BT03-01200 | 3000K |
| BT03-00630 | 6500K | BT03-01230 | 6500K |

| Type | Proline-IP/0.6mt | Proline-IP/1.2mt |
|------------------------|------------------|------------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 18W | 36W |
| Luminous | 1500lm | 2900lm |
| CRI | 70 | 70 |
| Power Factor | >0.5 | >0.9 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 10 | 10 |

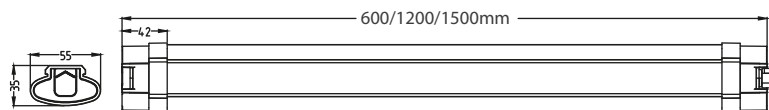




*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Features

- PC Cover
- Suitable For T8 Led Tube
- Easy & Quick Installation
- Suitable For Indoor & Outdoor Use



| Item No | BT05-10680 | BT05-20680 | BT05-11280 | BT05-21280 | BT05-11580 | BT05-21580 |
|------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Size | 1x0.6mt | 2x0.6mt | 1x1.2mt | 2x1.2mt | 1x1.5mt | 2x1.5mt |
| LED Tube Type | 0.6mt-T8 | 0.6mt-T8 | 1.2mt-T8 | 1.2mt-T8 | 1.5mt-T8 | 1.5mt-T8 |
| Socket | G13 | G13 | G13 | G13 | G13 | G13 |
| Body Color | Milky White | Milky White | Milky White | Milky White | Milky White | Milky White |
| Connection Type | Single Side Tube | Single Side Tube | Single Side Tube | Single Side Tube | Single Side Tube | Single Side Tube |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | ABS | ABS | ABS | ABS | ABS | ABS |
| Diffuser | PC | PC | PC | PC | PC | PC |
| Suitable For | BA52-206XX BA52-106XX | BA52-206XX BA52-106XX | BA52-212XX BA52-112XX | BA52-212XX BA52-112XX | BA52-215XX BA52-115XX | BA52-215XX BA52-115XX |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 16 | 12 | 16 | 12 | 16 | 12 |
| Dimension(WxHxA) | 666x58x68 | 666x58x96 | 1276x58x68 | 1276x58x96 | 1576x58x68 | 1576x58x96 |

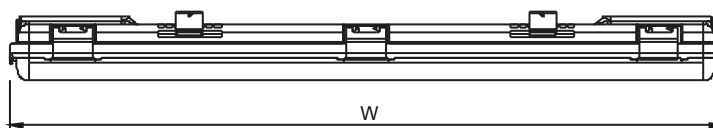



- **LED WALL & CEILING SENSOR LAMPS**
- **LED CEILING LAMPS**
- **LED WATERPROOF CEILING & WALL LAMPS**




Features

- No Flicking
- Built-in Driver
- Built-in Sensor
- High Efficiency
- Low Energy Consumption
- Easy & Quick Installation
- Suitable For Indoor Ceiling Use




| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BC15-00300 | 3000K |
| BC15-00330 | 6500K |

| | |
|------------------------|-------------|
| Type | ML300 |
| LED Type | SMD |
| Sensor Type | PIR |
| Body Color | White |
| Luminous | 900lm |
| Watts | 15W |
| CRI | 70 |
| Power Factor | >0.5 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | Iron |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 10 |

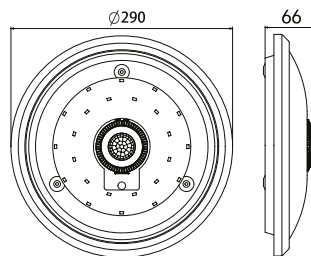

| | |
|---------------------|----------------------------------|
| Power consumption | :0.45W(static 0.1W) |
| Time delay | :Min.8sec.-Max.2min.(adjustable) |
| Detection angle | :360° |
| Detection distance | :Max.6m (<24°C) |
| Detection speed | :0.6-1.5m/s |
| Ambient light | :<3-2000lux |
| Installation height | :2m-4m |

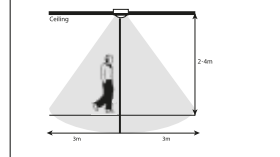





Features

- No Flicking
- Built-in Driver
- Built-in Sensor
- High Efficiency
- Low Energy Consumption
- Easy & Quick Installation
- For Indoor & Outdoor Use



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BC15-00500 | 3000K |
| BC15-00530 | 6500K |

| | |
|------------------------|-------------|
| Type | WLR |
| LED Type | SMD |
| Sensor Type | PIR |
| Body Color | White |
| Luminous | 630lm |
| Watts | 10W |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | ABS |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 10 |



| | |
|---------------------|----------------------------------|
| Power consumption | : 0.45W(static 0.1W) |
| Time delay | : Min.5sec-Max.5min.(adjustable) |
| Detection angle | : 120° |
| Detection distance | : Max.8m (<24°C) |
| Detection speed | : 0.6-1.5m/s |
| Ambient light | : <3-2000lux |
| Installation height | : 1.8m-3.5m |

*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

- Easy & Quick Installation
- Built in Motion Sensor
- Time Delay : Min. 120sec.
- Detection Range :Max. 3m (<24 C°)
- Detection Angle : 180°





A+



| ITEM NO | COLOR TEMP |
|------------|------------|
| BH15-01100 | 3000K |
| BH15-01130 | 6500K |

| | |
|------------------------|-------------|
| Type | Jade-Sensor |
| LED Type | SMD |
| Watts | 18W |
| Luminous | 1440lm |
| CRI | 80 |
| Power Factor | >0.55 |
| Beam Angle | 110° |
| Voltage | 220V-240VAC |
| Material | PC |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 10 |

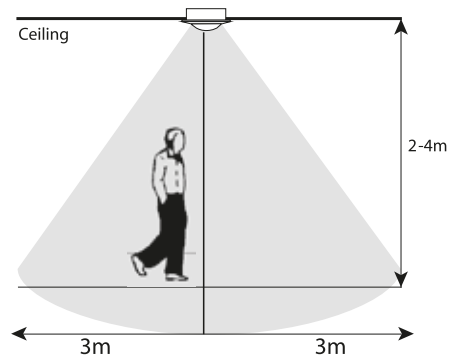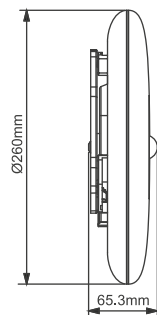

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com





Features

- No Flicking
- Built-in Driver
- Built-in Sensor
- High Efficiency
- Low Energy Consumption
- Easy & Quick Installation
- For Indoor & Outdoor Use



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|
| BH15-02100 | 3000K | BH15-02200 | 3000K |
| BH15-02130 | 6500K | BH15-02230 | 6500K |

| Type | Jade | Jade |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Watts | 20W | 30W |
| Luminous | 1440lm | 2060lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 10 | 10 |

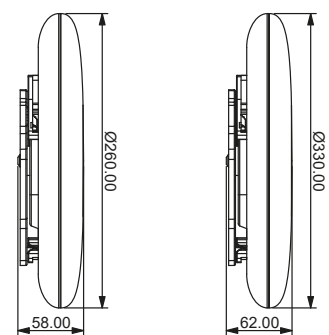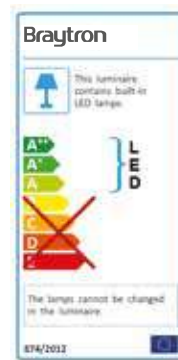

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Features

- No Flicking
- Built-in Driver
- Built-in Sensor
- High Efficiency
- Low Energy Consumption
- Easy & Quick Installation
- For Indoor & Outdoor Use



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|
| BH15-03100 | 3000K | BH15-03200 | 3000K |
| BH15-03130 | 6500K | BH15-03230 | 6500K |

| Type | Jade | Jade |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Watts | 20W | 30W |
| Luminous | 1440lm | 2060lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carlton | 10 | 10 |

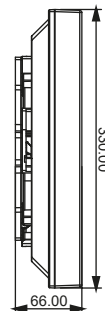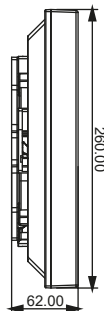

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Flicker-Free
- Built-in Driver
- Low Energy Consumption
- UGR<19
- Easy & Quick Installation
- Suitable For Indoor Application

3 Color in one •





3 CCT Control By Switch

ITEM NO | COLOR TEMP
 BH16-02200 | 3000K
 BH16-02230 | 6500K

ITEM NO | COLOR TEMP
 BH16-02280 | 3000K/4000K/6500K

| | | |
|------------------------|-------------|-------------|
| Type | Jade-Slim | Jade-Slim |
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 24W | 3x24W |
| Luminous | 1940lm | 1940lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Iron | Iron |
| Diffuser | PMMA | PMMA |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 10 | 10 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

• 3 Color in one



Features



- Flicker-Free
- Built-in Driver
- Low Energy Consumption
- UGR<19
- Easy & Quick Installation
- Suitable For Indoor Application

| ITEM NO | COLOR TEMP |
|------------|------------|
| BH16-03200 | 3000K |
| BH16-03230 | 6500K |

3 CCT Control By Switch

| ITEM NO | COLOR TEMP |
|------------|-------------------|
| BH16-03280 | 3000K/4000K/6500K |

| Type | Jade-Slim | Jade-Slim |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 24W | 3x24W |
| Luminous | 1940lm | 1940lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Iron | Iron |
| Diffuser | PMMA | PMMA |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 10 | 10 |

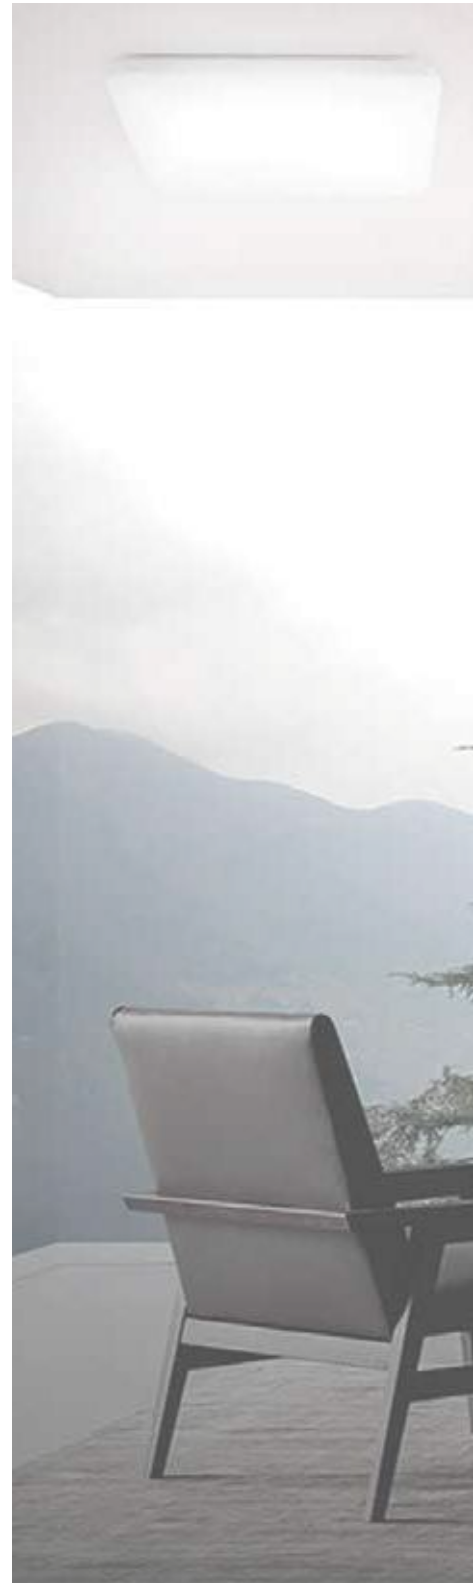

Features

- Flicker-Free
- Built-in Driver
- High Efficiency
- Low Energy Consumption
- UGR<19
- Easy & Quick Installation
- Suitable For Indoor & Outdoor Use







ITEM NO | COLOR TEMP
 BC16-00200 | 3000K
 BC16-00230 | 6500K

ITEM NO | COLOR TEMP
 BC16-00300 | 3000K
 BC16-00330 | 6500K

ITEM NO | COLOR TEMP
 BC16-00600 | 3000K
 BC16-00630 | 6500K

| | | | |
|-------------------------------|-------------|-------------|-------------|
| Type | Elips | Elips | Round |
| LED Type | SMD | SMD | SMD |
| Body Colour | White | White | White |
| Watts | 12W | 18W | 18W |
| Luminous | 840lm | 1260lm | 1260lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | ABS | ABS | ABS |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 20 | 20 | 20 |

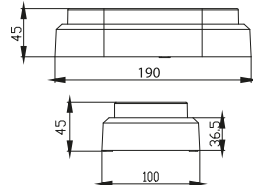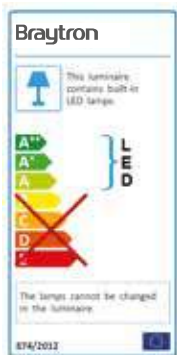

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Features


- Flicker-Free
- Built-in Driver
- High Efficiency
- Low Energy Consumption
- UGR<19
- Easy & Quick Installation
- Suitable For Indoor & Outdoor Use



Powered by
SAMSUNG LED

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BC17-00300 | 3000K |
| BC17-00330 | 6500K |

| | |
|------------------------|-------------|
| Type | Elips |
| LED Type | SMD |
| Body Colour | White |
| Watts | 20W |
| Luminous | 1460lm |
| CRI | 70 |
| Power Factor | >0.5 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | ABS |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 20 |




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

raytron
lighting expert



- LED RECESSED SLIM PANELS
- LED SURFACE SLIM PANELS

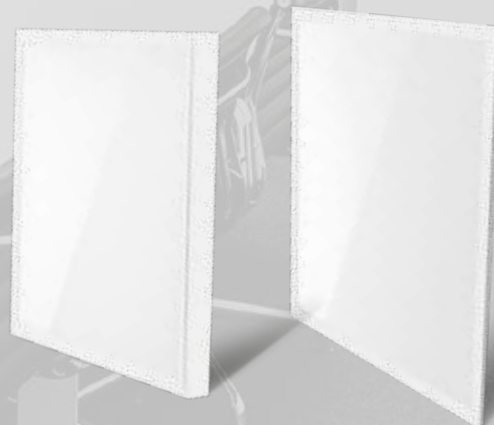

Application

- Office
- Schools
- Restaurants
- Healthcare Applications





Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|
| BP16-36600 | 3000K | BP16-36200 | 3000K |
| BP16-36610 | 4000K | BP16-36210 | 4000K |
| BP16-36630 | 6500K | BP16-36230 | 6500K |

| Type | Panelled-RP | Panelled-RP |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 40W | 40W |
| Luminous | 3400lm | 3400lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 5 | 5 |

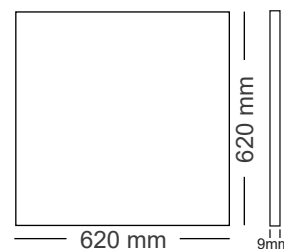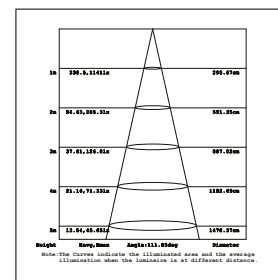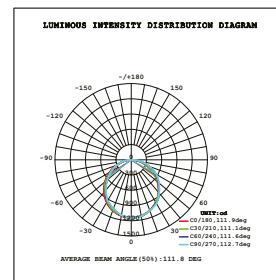

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver





Powered by
SAMSUNG LED

A+ 100Lm/w

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP16-46600 | 3000K |
| BP16-46610 | 4000K |
| BP16-46630 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP16-46200 | 3000K |
| BP16-46210 | 4000K |
| BP16-46230 | 6500K |

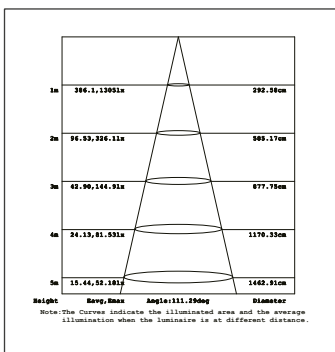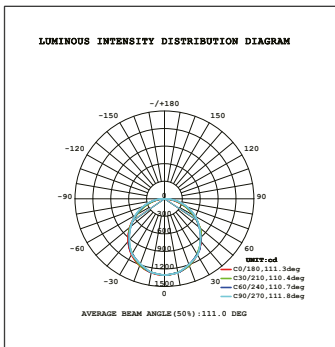

| Type | Panelled-RP | Panelled-RP |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 40W | 40W |
| Luminous | 4000lm | 4000lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 5 | 5 |

3 YEARS WARRANTY

LED 30,000 HOURS



CE ENEC

EMC RoHS LVD IP20

This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire.

Braytron

874/2012

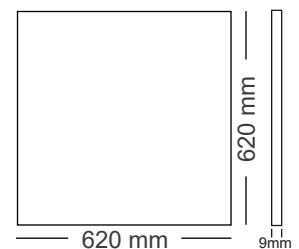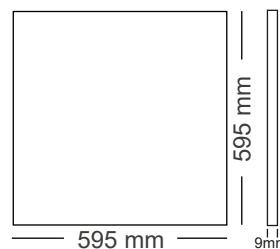


*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver

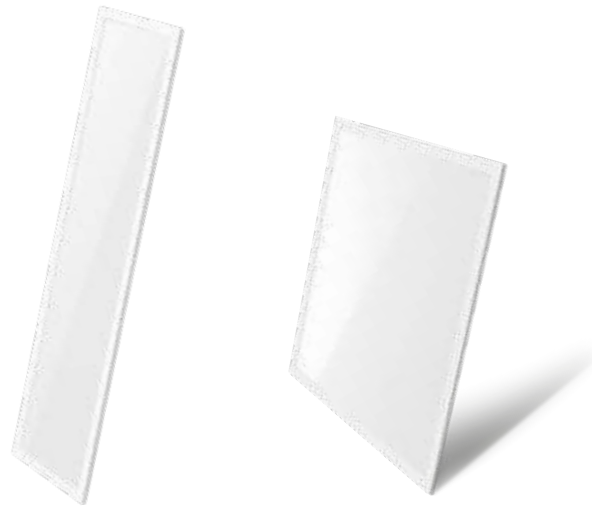




Powered by
SAMSUNG LED



| ITEM NO | COLOR TEMP |
|------------|------------|
| BP16-33110 | 4000K |
| BP16-33130 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP16-33300 | 3000K |
| BP16-33310 | 4000K |
| BP16-33330 | 6500K |

| Type | Panelled-RP | Panelled-RP |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 40W | 20W |
| Luminous | 3400lm | 1620lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 110° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Cartron | 5 | 20 |

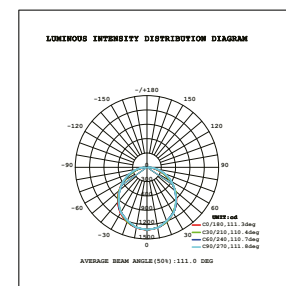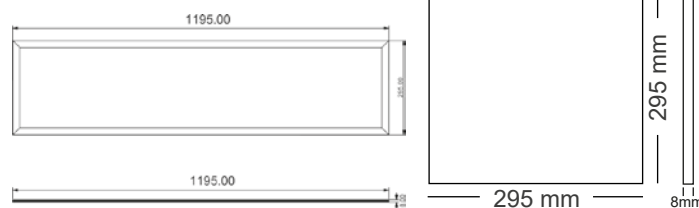

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Office
- Schools
- Restaurants
- Healthcare Applications



Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|
| BP15-36600 | 3000K | BP15-56600 | 3000K |
| BP15-36610 | 4000K | BP15-56610 | 4000K |
| BP15-36630 | 6500K | BP15-56630 | 6500K |

| Type | Panelled-RC | Panelled-RC |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 40W | 48W |
| Luminous | 3200lm | 3840lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 10 | 10 |

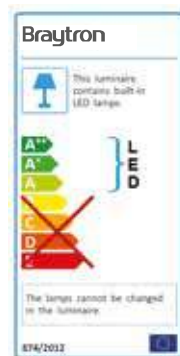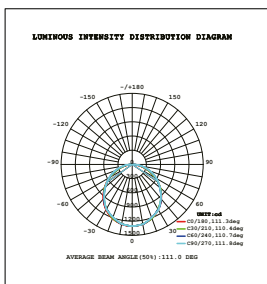

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- High Efficiency
- Building Driver
- Low Energy Consumption
- UGR<19
- Ultra Slim Design
- For Recessed Use





Powered by
SAMSUNG LED


A+ 80Lm/w

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP22-36600 | 3000K |
| BP22-36610 | 4000K |
| BP22-36630 | 6500K |

| | |
|------------------------|-------------|
| Type | Panelled-RC |
| LED Type | SMD |
| Body Color | White |
| Watts | 40W |
| Luminous | 3200lm |
| CRI | 80 |
| Power Factor | >0.9 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | Aluminium |
| Diffuser | PS |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 10 |

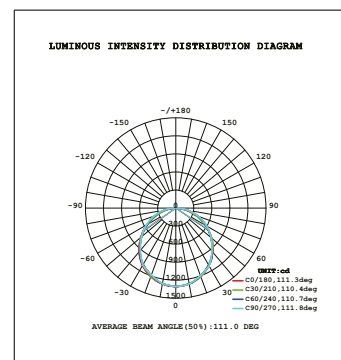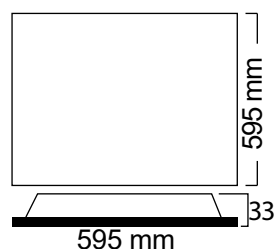


60x60 Aluminum Surface Mounted Frame



| Item No | Body Color |
|------------|------------|
| BP16-99040 | White |

| | |
|------------|----------|
| Body Color | White |
| Material | Aluminum |
| Pcs/Carton | 10 |


60x60 Clip-in Ceiling Frame



| Item No | Body Color |
|------------|------------|
| BP16-99080 | White |

| | |
|------------|-------|
| Body Color | White |
| Material | Iron |
| Pcs/Carton | 10 |


30x30 Aluminum Surface Mounted Frame



| Item No | Body Color |
|------------|------------|
| BP16-99000 | White |

| | |
|------------|----------|
| Body Color | White |
| Material | Aluminum |
| Pcs/Carton | 12 |


30x30 Clip-in Ceiling Frame



| Item No | Body Color |
|------------|------------|
| BP16-99070 | White |

| | |
|------------|-------|
| Body Color | White |
| Material | Iron |
| Pcs/Carton | 10 |


30x120 Aluminum Surface Mounted Frame



| Item No | Body Color |
|------------|------------|
| BP16-99030 | White |


| | |
|------------|----------|
| Body Color | White |
| Material | Aluminum |
| Pcs/Carton | 12 |

Panel-Pendant Apparatus



| Item No | Pcs/Carton |
|------------|------------|
| BP16-99060 | 20 |

Panel-Drywall Recessed Mounting (4 pieces)



| Item No | Pcs/Carton |
|------------|------------|
| BP16-99050 | 20 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application



- Office
- Schools
- Restaurants
- Healthcare Applications

• UGR<19

• Slim Design

Features

- High Efficiency
- Building Driver
- Low Energy Consumption

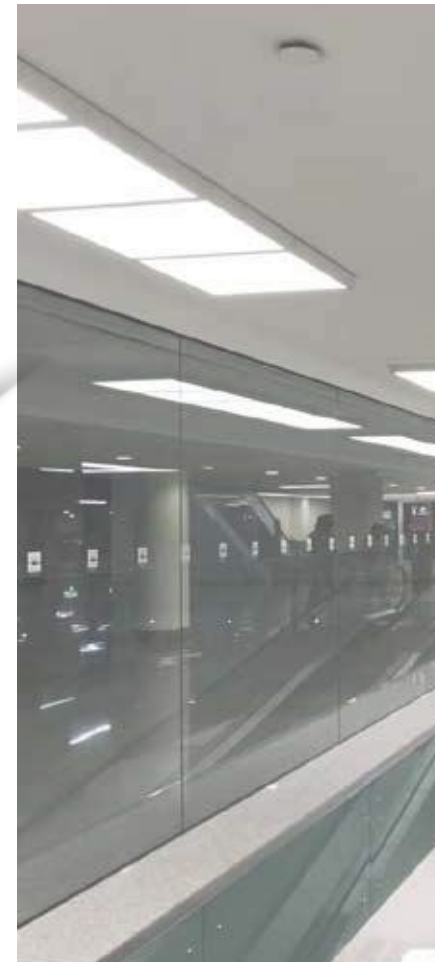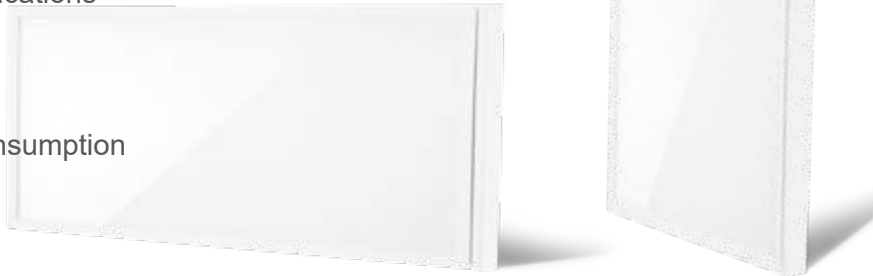

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP21-03110 | 4000K |
| BP21-03130 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP21-06600 | 3000K |
| BP21-06610 | 4000K |
| BP21-06630 | 6500K |




| Type | Panelled-SL | Panelled-SL |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 50W | 50W |
| Luminous | 4000lm | 4000lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 120° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Iron | Iron |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 1 | 1 |



This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire.

Braytron

874/2012

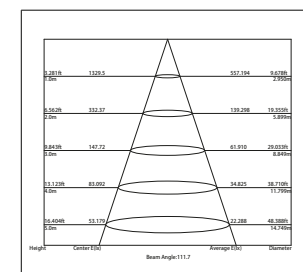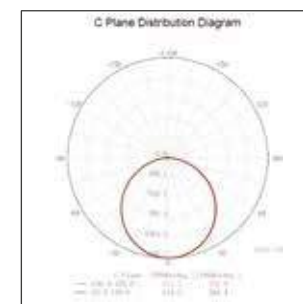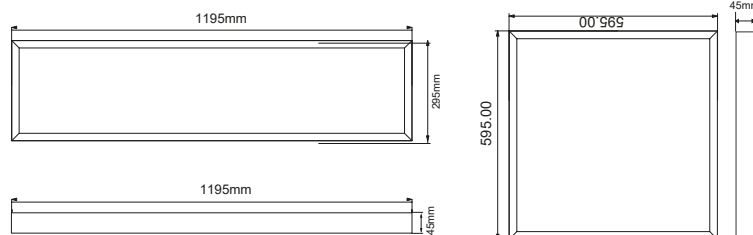

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features



- High Efficiency
- Building Driver
- Low Energy Consumption

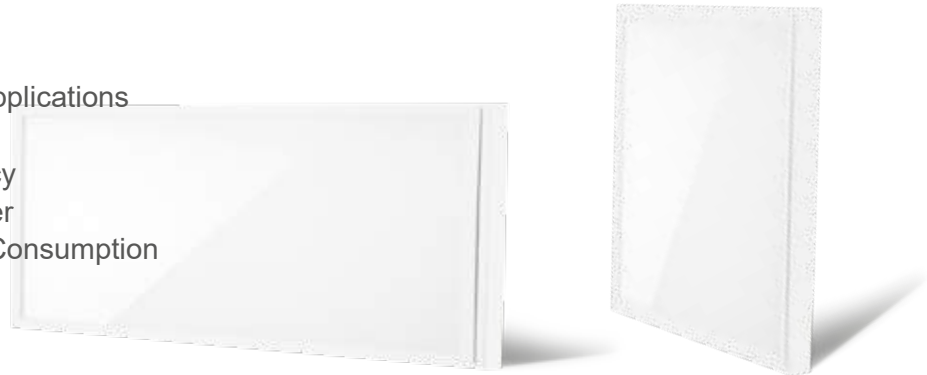

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP22-03110 | 4000K |
| BP22-03130 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP22-06610 | 4000K |
| BP22-06630 | 6500K |

| Type | Panelled-FL | Panelled-FL |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 40W | 40W |
| Luminous | 3200lm | 3200lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Iron | Iron |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 5 | 5 |

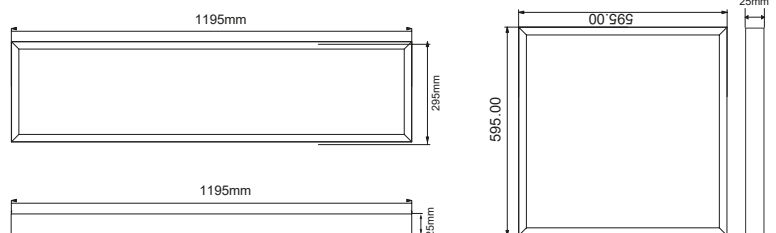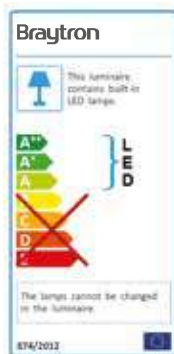

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption





| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-60600 | 3000K |
| BP01-60610 | 4000K |
| BP01-60630 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-61200 | 3000K |
| BP01-61210 | 4000K |
| BP01-61230 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-61800 | 3000K |
| BP01-61810 | 4000K |
| BP01-61830 | 6500K |

| Type | SMD-CRP | SMD-CRP | SMD-CRP |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Color | White | White | White |
| Watts | 6W | 12W | 18W |
| Luminous | 360lm | 910lm | 1440lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | PC | PC | PC |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Cutout | 105mm | 155mm | 210mm |
| Pcs/Carton | 40 | 20 | 20 |

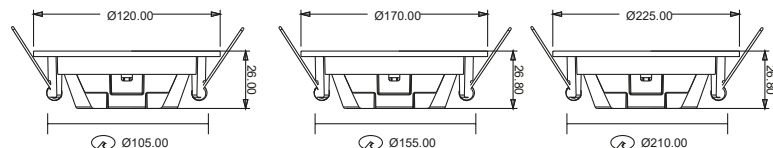

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption





| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-30300 | 3000K |
| BP01-30310 | 4000K |
| BP01-30330 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-30600 | 3000K |
| BP01-30610 | 4000K |
| BP01-30630 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-31200 | 3000K |
| BP01-31210 | 4000K |
| BP01-31230 | 6500K |

| Type | SMD-CRD | SMD-CRD | SMD-CRD |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Color | White | White | White |
| Watts | 3W | 6W | 12W |
| Luminous | 150lm | 350lm | 910lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PS | PS | PS |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Cutout | 75mm | 105mm | 155mm |
| Pcs/Carton | 40 | 40 | 20 |

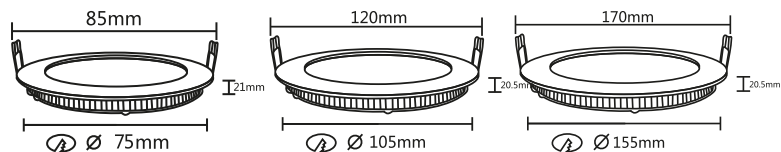

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver





| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-31500 | 3000K |
| BP01-31510 | 4000K |
| BP01-31530 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-31800 | 3000K |
| BP01-31810 | 4000K |
| BP01-31830 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP01-32400 | 3000K |
| BP01-32410 | 4000K |
| BP01-32430 | 6500K |

| Type | SMD-CRD | SMD-CRD | SMD-CRD |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Color | White | White | White |
| Watts | 15W | 18W | 24W |
| Luminous | 1120lm | 1360lm | 1850lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PS | PS | PS |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Cutout | 175mm | 210mm | 275mm |
| Pcs/Carton | 20 | 20 | 10 |

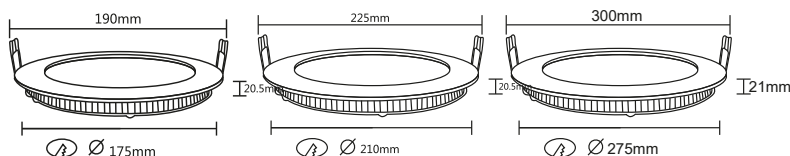

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications



Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|------------|------------|
| BP02-30600 | 3000K | BP02-31200 | 3000K | BP02-31800 | 3000K | BP02-32400 | 3000K |
| BP02-30610 | 4000K | BP02-31210 | 4000K | BP02-31810 | 4000K | BP02-32410 | 4000K |
| BP02-30630 | 6500K | BP02-31230 | 6500K | BP02-31830 | 6500K | BP02-32430 | 6500K |

| Type | SMD-CS | SMD-CS | SMD-CS | SMD-CS |
|------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | White | White | White | White |
| Watts | 6W | 12W | 18W | 24W |
| Luminous | 350lm | 910lm | 1360lm | 1850lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.9 |
| Beam Angle | 120° | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PS | PS | PS | PS |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Cutout | 105mm | 155mm | 205mm | 275mm |
| Pcs/Carton | 40 | 20 | 20 | 10 |

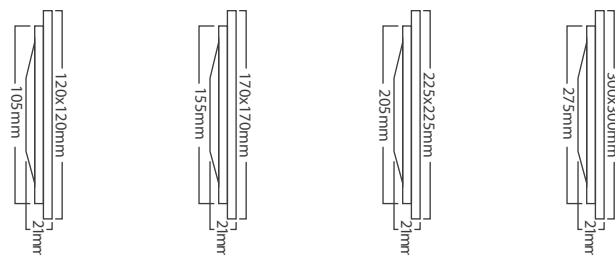

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications



Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|------------|------------|
| BP03-31200 | 3000K | BP03-31800 | 3000K | BP03-32400 | 3000K | BP03-33600 | 3000K |
| BP03-31210 | 4000K | BP03-31810 | 4000K | BP03-32410 | 4000K | BP03-33610 | 4000K |
| BP03-31230 | 6500K | BP03-31830 | 6500K | BP03-32430 | 6500K | BP03-33630 | 6500K |

| Type | SMD-SRD | SMD-SRD | SMD-SRD | SMD-SRD |
|-------------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | White | White | White | White |
| Watts | 12W | 18W | 24W | 36W |
| Luminous | 910lm | 1360lm | 1850lm | 2500lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.9 |
| Beam Angle | 120° | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PS | PS | PS | PS |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 10 | 10 |

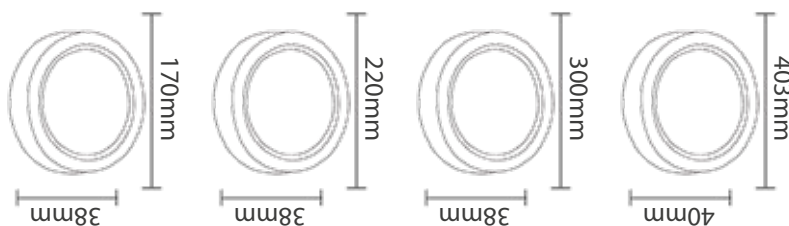

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications






Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|------------|------------|
| BP04-31200 | 3000K | BP04-31800 | 3000K | BP04-32400 | 3000K | BP04-33600 | 3000K |
| BP04-31210 | 4000K | BP04-31810 | 4000K | BP04-32410 | 4000K | BP04-33610 | 4000K |
| BP04-31230 | 6500K | BP04-31830 | 6500K | BP04-32430 | 6500K | BP04-33630 | 6500K |

| Type | SMD-SRD | SMD-SRD | SMD-SRD | SMD-SRD |
|-------------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | White | White | White | White |
| Watts | 12W | 18W | 24W | 36W |
| Luminous | 910lm | 1360lm | 1850lm | 2500lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.9 |
| Beam Angle | 120° | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PS | PS | PS | PS |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 10 | 10 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com





- LED LINEAR LIGHT
- LED COB DOWNLIGHTS
- LED SMD DOWNLIGHTS
- LED SPOTLIGHTS



| ITEM NO | COLOR TEMP |
|------------|------------|
| BH06-00100 | 3000K |
| BH06-00130 | 6500K |

| | |
|------------------------|-------------|
| Type | MINICOB |
| LED Type | COB |
| Body Color | White |
| Watts | 3W |
| Luminous | 210lm |
| CRI | 70 |
| Power Factor | >0.5 |
| Beam Angle | 30° |
| Voltage | 220V-240VAC |
| Material | Aluminium |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Cutout | 32mm |
| Pcs/Carton | 100 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features




- No Flicking
- High Efficiency
- Low Energy Consumption



| ITEM NO | COLOR TEMP |
|------------|------------|
| BD02-00500 | 3000K |
| BD02-00510 | 4000K |
| BD02-00530 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD02-10500 | 3000K |
| BD02-10530 | 6500K |

| Type | SPOTLED-G1 | SPOTLED-G1 |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 5W | 5W |
| Luminous | 380lm | 380lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 38° | 38° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Cutout | 70mm | 70mm |
| Pcs/Carton | 100 | 100 |

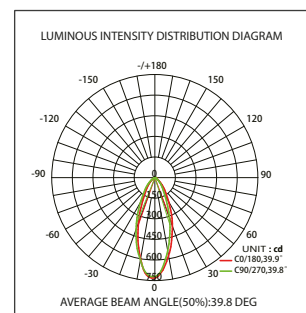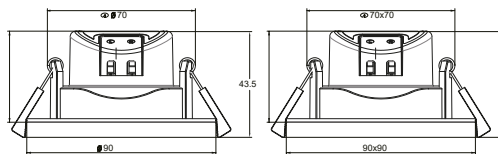



Application

- Office
- Schools
- Bathroom
- Restaurants
- Healthcare Applications




Features

- No Flicking
- High Efficiency
- Low Energy Consumption



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD01-00500 | 3000K |
| BD01-00530 | 6500K |

| | |
|------------------------|-------------|
| Type | SPOTLED-G1 |
| LED Type | SMD |
| Body Color | White |
| Watts | 5W |
| Luminous | 380lm |
| CRI | 80 |
| Power Factor | >0.5 |
| Beam Angle | 38° |
| Voltage | 220V-240VAC |
| Material | PC |
| Diffuser | PC |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Cutout | 67mm |
| Pcs/Carton | 100 |

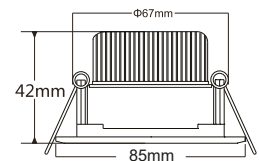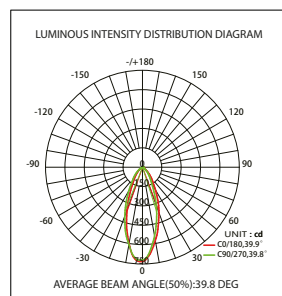

*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Bathroom
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption






A+



| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|
| BD02-01000 | 3000K | BD02-01800 | 3000K |
| BD02-01010 | 4000K | BD02-01830 | 6500K |
| BD02-01030 | 6500K | | |



| Type | SPOTLED-G1 | SPOTLED-G1 |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Color | White | White |
| Watts | 10W | 18W |
| Luminous | 800lm | 1440lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 38° | 38° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | PC | PC |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Cutout | 92mm | 120mm |
| Pcs/Cartron | 50 | 100 |

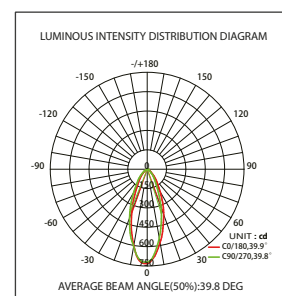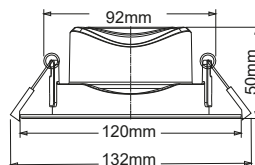

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features

- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver
- UGR<19





Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP13-00800 | 3000K |
| BP13-00810 | 4000K |
| BP13-00830 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BP13-00801 | 3000K |
| BP13-00811 | 4000K |
| BP13-00831 | 6500K |

| | | |
|------------------------|-------------|-------------|
| Type | Faton | Faton |
| LED Type | SMD | SMD |
| Body Color | White | Black |
| Watts | 8W | 8W |
| Luminous | 800lm | 800lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Cutout | 70mm | 70mm |
| Pcs/Carton | 20 | 20 |

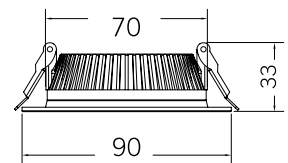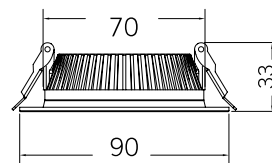

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features



- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver
- UGR<19



Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|------------|------------|
| BP13-01200 | 3000K | BP13-01800 | 3000K | BP13-02400 | 3000K | BP13-03200 | 3000K |
| BP13-01210 | 4000K | BP13-01810 | 4000K | BP13-02410 | 4000K | BP13-03210 | 4000K |
| BP13-01230 | 6500K | BP13-01830 | 6500K | BP13-02430 | 6500K | BP13-03230 | 6500K |

| Type | Faton | Faton | Faton | Faton |
|------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Color | White | White | White | White |
| Watts | 12W | 18W | 24W | 32W |
| Luminous | 1200lm | 1800lm | 2400lm | 2880lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 | >0.9 |
| Beam Angle | 120° | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Diffuser | PC | PC | PC | PC |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Cutout | 93mm | 140mm | 192mm | 192mm |
| Pcs/Carton | 20 | 20 | 10 | 10 |

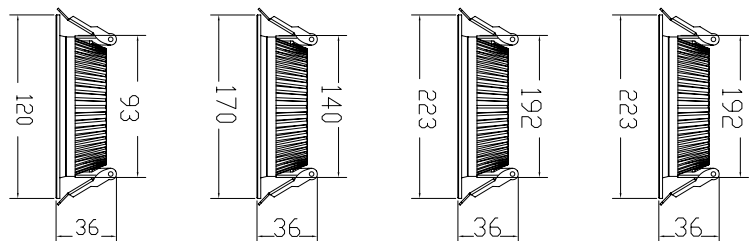

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Schools
- Restaurants
- Shops
- Stores




Features

- No Flicking
- High Grade Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption



| ITEM NO | COLOR TEMP |
|------------|------------|
| BD36-00300 | 3000K |
| BD36-00310 | 4000K |
| BD36-00330 | 6500K |

| | |
|------------------------|-------------|
| Type | SHOPLINE-R |
| LED Type | COB |
| Body Color | White |
| Watts | 30W |
| Luminous | 2700lm |
| CRI | 80 |
| Power Factor | >0.9 |
| Beam Angle | 24° |
| Voltage | 220V-240VAC |
| Material | Aluminium |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%70 |
| Cutout | 125mm |
| Pcs/Carton | 12 |

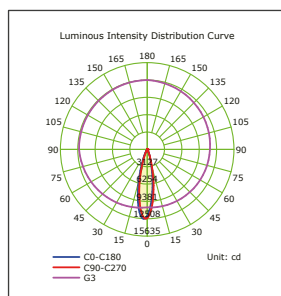

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Application

Features





- No Flicking
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver



Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|
| BD36-00500 | 3000K | BD36-00600 | 3000K | BD36-00700 | 3000K |
| BD36-00510 | 4000K | BD36-00610 | 4000K | BD36-00710 | 4000K |
| BD36-00530 | 6500K | BD36-00630 | 6500K | BD36-00730 | 6500K |

| Type | SHOPLINE | SHOPLINE | SHOPLINE |
|------------------------|-------------|-------------|-------------|
| LED Type | COB | COB | COB |
| Body Color | White | White | White |
| Watts | 30W | 2x30W | 3x30W |
| Luminous | 2700lm | 5400lm | 8400lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 24° | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium | Aluminium |
| Diffuser | Glass | Glass | Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 6 | 6 |

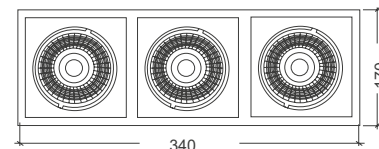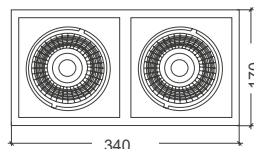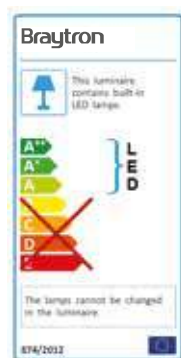

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Office
- Schools
- Restaurants
- Healthcare Applications

Features



- Flicker Free
- High Efficiency
- Low Energy Consumption
- Optional Triac Dimming Driver
- UGR<19



Powered by **SAMSUNG LED**

- Material: High Grade Aluminium
- Diffuser: Polycarbonate
- Beam Angle: 120°
- Driver: Included
- Environmental Humidity: %5-%70


| Item No | Body Color | Color Temp | Watt | Lumen | Size (mm) | PF |
|------------|------------|------------|------|--------|------------|------|
| BN01-00600 | White | 3000K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-00610 | White | 4000K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-00630 | White | 6500K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-00601 | Black | 3000K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-00611 | Black | 4000K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-00631 | Black | 6500K | 18W | 1620lm | 65x85x600 | >0.9 |
| BN01-01200 | White | 3000K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01210 | White | 4000K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01230 | White | 6500K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01201 | Black | 3000K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01211 | Black | 4000K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01231 | Black | 6500K | 36W | 3240lm | 65x85x1200 | >0.9 |
| BN01-01500 | White | 3000K | 45W | 4050lm | 65x85x1500 | >0.9 |
| BN01-01510 | White | 4000K | 45W | 4050lm | 65x85x1500 | >0.9 |
| BN01-01530 | White | 6500K | 45W | 4050lm | 65x85x1500 | >0.9 |
| BN01-01501 | Black | 3000K | 45W | 4050lm | 65x85x1500 | >0.9 |
| BN01-01511 | Black | 4000K | 45W | 4050lm | 65x85x1500 | >0.9 |
| BN01-01531 | Black | 6500K | 45W | 4050lm | 65x85x1500 | >0.9 |



Optional Accessories

- .Optional Body Color
- .Optional Different Size
- .Optional Hanging Accessories (2mt)
- .Optional Emergency Kits
- .Optional DALI DIM

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

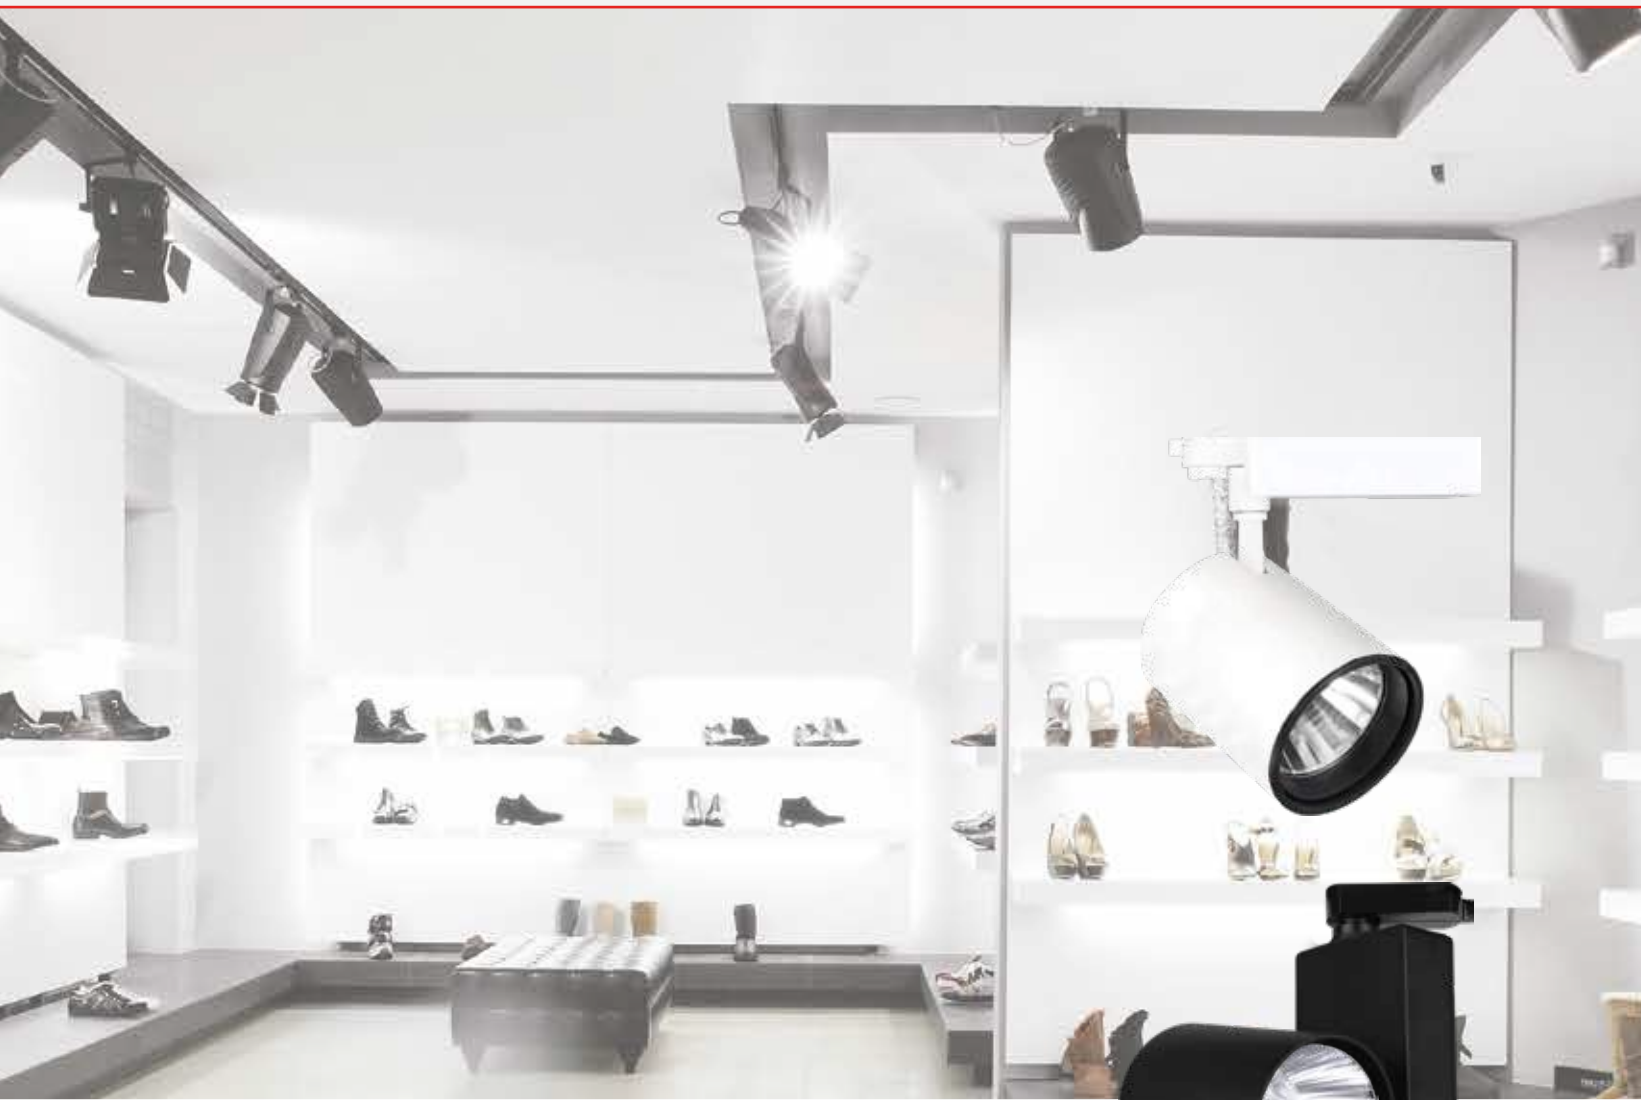

• LED COB TRACKLIGHTS





Application

- Hotels & Office
- Restaurants
- Shops
- Stores

Features





- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-00300 | 3000K |
| BD30-00310 | 4000K |

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-00301 | 3000K |
| BD30-00311 | 4000K |

| Type | SHOPLINE-A | SHOPLINE-A |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Colour | White | Black |
| Watts | 30W | 30W |
| Luminous | 2600lm | 2600lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 30° | 30° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

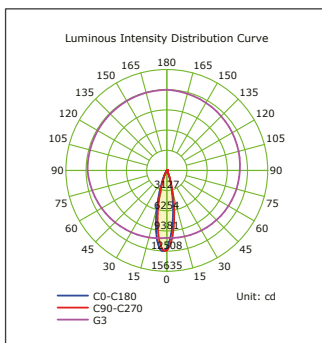

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption






Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-00200 | 3000K |
| BD30-00210 | 4000K |
| BD30-00220 | 5000K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-00201 | 3000K |
| BD30-00211 | 4000K |
| BD30-00221 | 5000K |

| Type | SHOPLINE-P | SHOPLINE-P |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 30W | 30W |
| Luminous | 2660lm | 2660lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

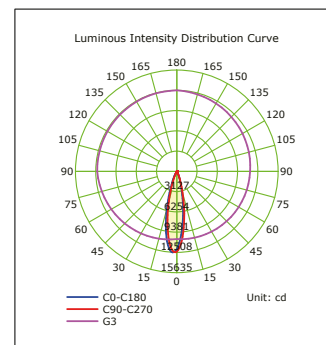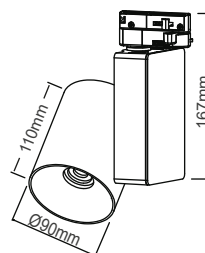



Application

- Hotels & Office
- Restaruants
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption





Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-2020 | 3000K |
| BD30-20210 | 4000K |
| BD30-20220 | 5000K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-20201 | 3000K |
| BD30-20211 | 4000K |
| BD30-20221 | 5000K |

| Type | SHOPLINE-P | SHOPLINE-P |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 40W | 40W |
| Luminous | 3600lm | 3600lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

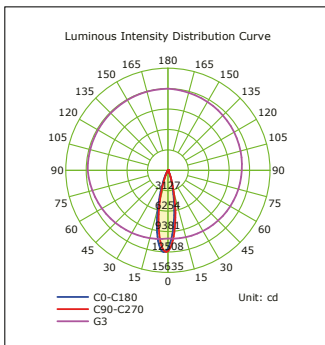

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption






Powered by
SAMSUNG LED

ITEM NO | COLOR TEMP
BD30-20400 | 3000K
BD30-20410 | 4000K

ITEM NO | COLOR TEMP
BD30-20401 | 3000K
BD30-20411 | 4000K

| Type | SHOPLINE-P | SHOPLINE-P |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 40W | 40W |
| Luminous | 3600lm | 3600lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

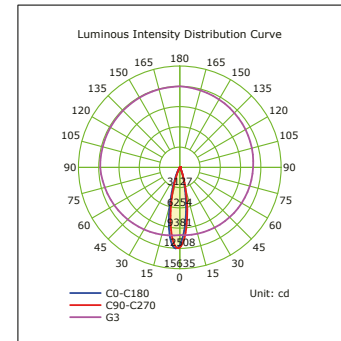



Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption





Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-01300 | 3000K |
| BD30-01310 | 4000K |
| BD30-01320 | 5000K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-01301 | 3000K |
| BD30-01311 | 4000K |
| BD30-01321 | 5000K |

| Type | SHOPLINE-B | SHOPLINE-B |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 30W | 30W |
| Luminous | 2660lm | 2660lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

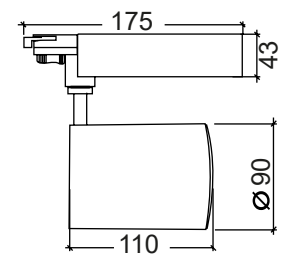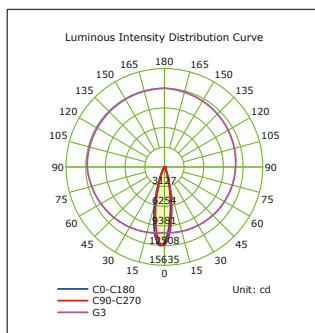


*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption



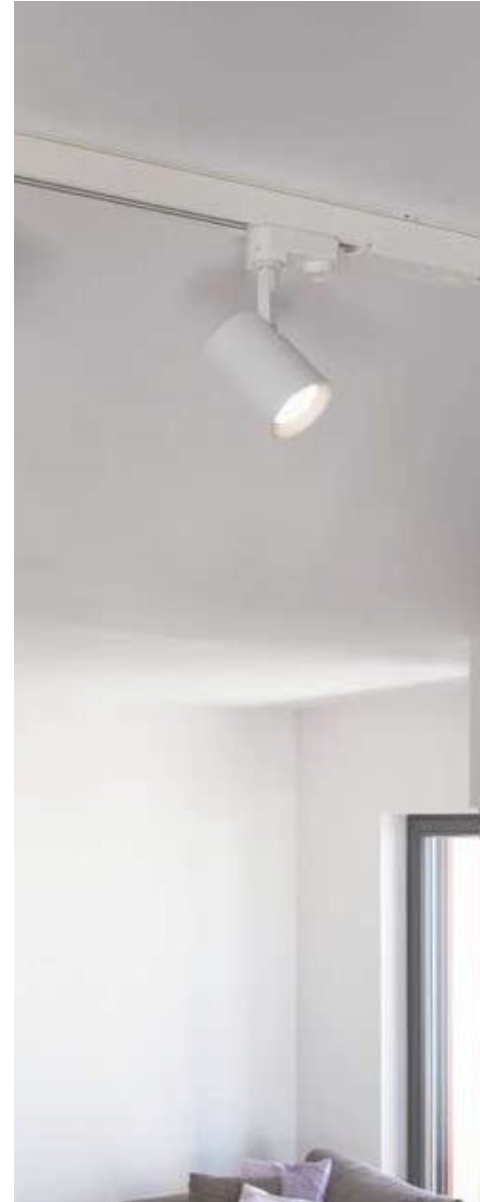


Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-21300 | 3000K |
| BD30-21310 | 4000K |
| BD30-21320 | 5000K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-21301 | 3000K |
| BD30-21311 | 4000K |
| BD30-21321 | 5000K |

| Type | SHOPLINE-B | SHOPLINE-B |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 40W | 40W |
| Luminous | 3600lm | 3600lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

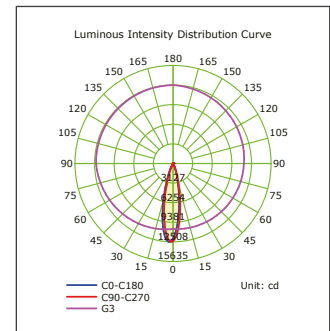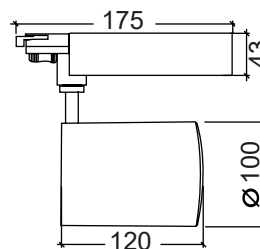



Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features




- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01700 | 3000K |
| BD30-01710 | 4000K |

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01701 | 3000K |
| BD30-01711 | 4000K |

| Type | SHOPLINE-BC | SHOPLINE-BC |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 30W | 30W |
| Luminous | 2200lm | 2200lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

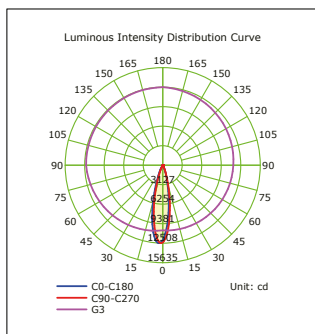

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Application

- Hotels & Office
- Restaurants
- Shops
- Stores

Features

- No Flicking
- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption






Powered by
SAMSUNG LED

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-01000 | 3000K |
| BD30-01010 | 4000K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BD30-01001 | 3000K |
| BD30-01011 | 4000K |

| Type | SHOPLINE-B | SHOPLINE-B |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 15W | 15W |
| Luminous | 1180lm | 1180lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

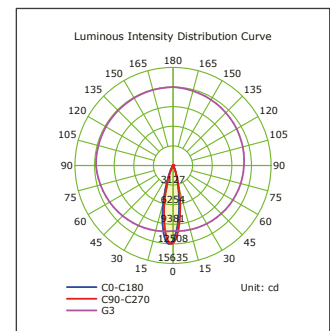



Application

- Hotels & Office
- Restaruants
- Shops
- Stores

Features

- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption






Powered by
SAMSUNG LED

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01600 | 3000K |
| BD30-01610 | 4000K |

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01601 | 3000K |
| BD30-01611 | 4000K |

| Type | SHOPLINE-D | SHOPLINE-D |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 30W | 30W |
| Luminous | 2660lm | 2660lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

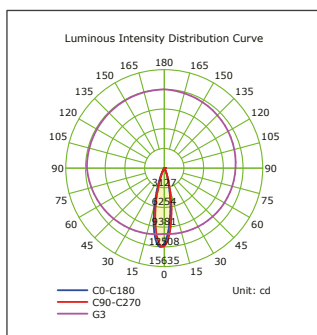

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Hotels & Office
- Restaruant
- Shops
- Stores

Features

- No Flicking
- Aluminium Material
- Anti-Glare Lens
- High Efficiency
- Low Energy Consumption






Powered by
SAMSUNG LED

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01400 | 3000K |
| BD30-01410 | 4000K |

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BD30-01401 | 3000K |

| Type | SHOPLINE-D | SHOPLINE-D |
|------------------------|-------------|-------------|
| LED Type | COB | COB |
| Body Color | White | Black |
| Watts | 15W | 15W |
| Luminous | 1180lm | 1180lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 24° | 24° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminium | Aluminium |
| Diffuser | PMMA Lens | PMMA Lens |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 12 | 12 |

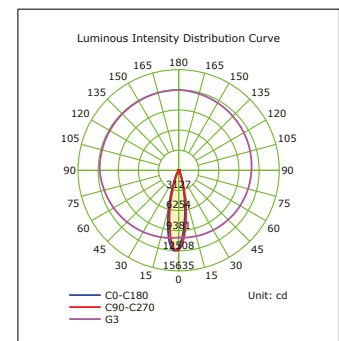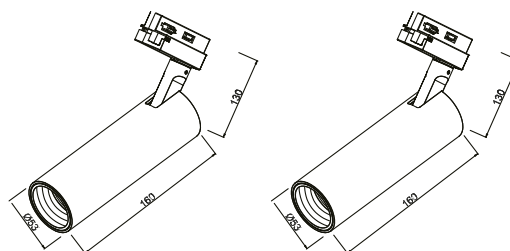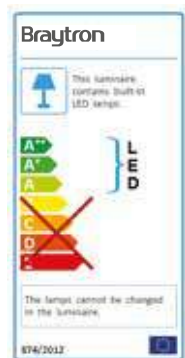

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaurants
- Shops
- Stores
- Homes

Features

- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs
- Adjustable Structure



Suitable for GU10 BULB

50mm



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00600 | WHITE |
| BH04-00601 | BLACK |


| | |
|------------------------|-------------|
| Type | BETA-TR-2 |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Rail Socket | 2 wires |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 12 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

- **GU10 RECESSED SPOTLIGHT FITTINGS**
- **GU10 SURFACE SPOTLIGHT FITTINGS**



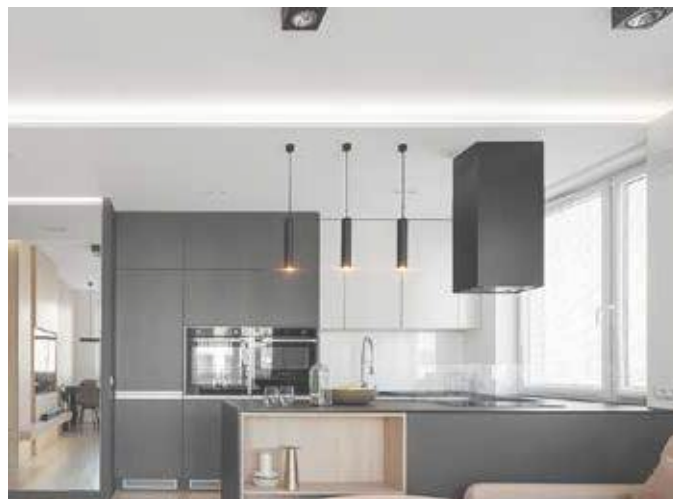

Application

- Hotels & Office
- Restaurants
- Shops
- Stores
- Homes

Features



- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs
- Adjustable Structure

Suitable for
GU10 BULB



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00400 | WHITE |
| BH04-00401 | BLACK |

| | |
|-------------------------------|-------------|
| Type | BETA-PD |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 12 |

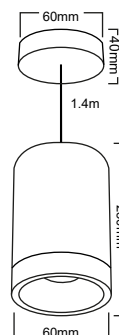

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaurants
- Shops
- Stores & Homes



Features

- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs





| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00100 | WHITE |
| BH04-00101 | BLACK |

| | |
|------------------------|-------------|
| Type | BETA-SR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

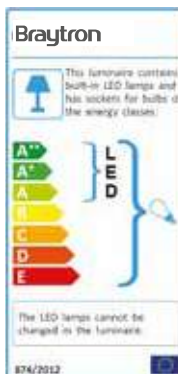

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

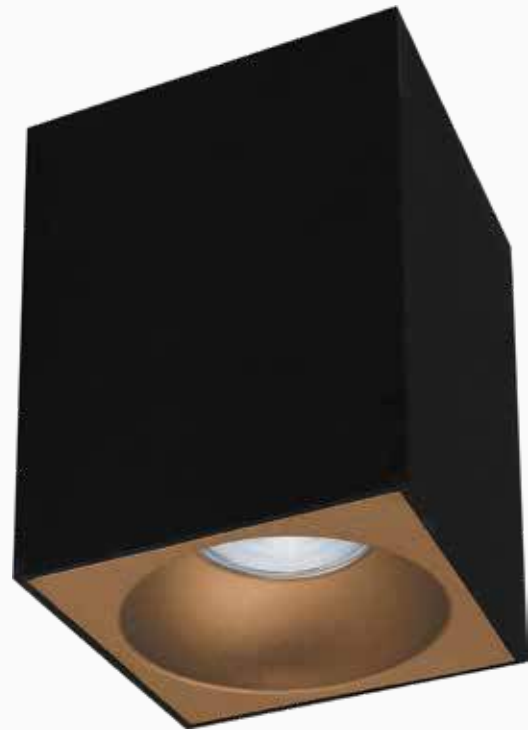
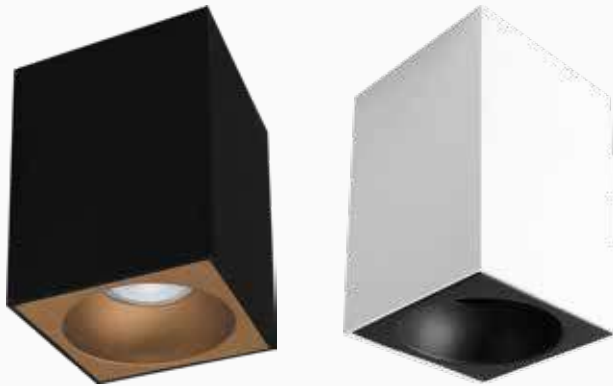


- Application**
- Hotels & Office
 - Restaruants
 - Shops
 - Stores & Homes
- Features**
- Aluminium Material
 - Easy installation
 - Anti Glare Design
 - Suitable For GU10 Bulbs



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00110 | WHITE |
| BH04-00111 | BLACK |

| | |
|------------------------|-------------|
| Type | BETA-SS |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

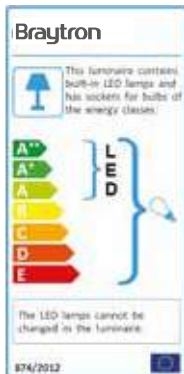

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaurants
- Shops
- Stores & Homes



Features

- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00200 | WHITE |
| BH04-00201 | BLACK |

| | |
|------------------------|-------------|
| Type | GAMA-SR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

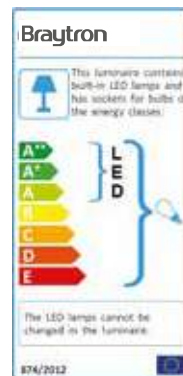



Application

- Hotels & Office
- Restaruants
- Shops
- Stores & Homes

Features



- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs

Suitable for GU10 BULB



| ITEM NO | BODY COLOR |
|------------|------------|
| BH04-00210 | WHITE |
| BH04-00211 | BLACK |

| | |
|------------------------|-------------|
| Type | GAMA-SS |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

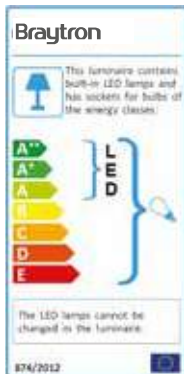

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaurants
- Shops
- Stores & Homes



Features

- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00300 | WHITE |
| BH04-00301 | BLACK |

| | |
|------------------------|-------------|
| Type | GAMA-SR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 50 |

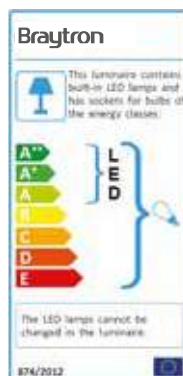



Application

- Hotels & Office
- Restaruants
- Shops
- Stores & Homes

Features




- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs

Suitable for GU10 BULB



| | |
|------------|------------|
| ITEM NO | BODY COLOR |
| BH04-00310 | WHITE |
| BH04-00311 | BLACK |

| | |
|------------------------|-------------|
| Type | GAMA-SS |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 50 |

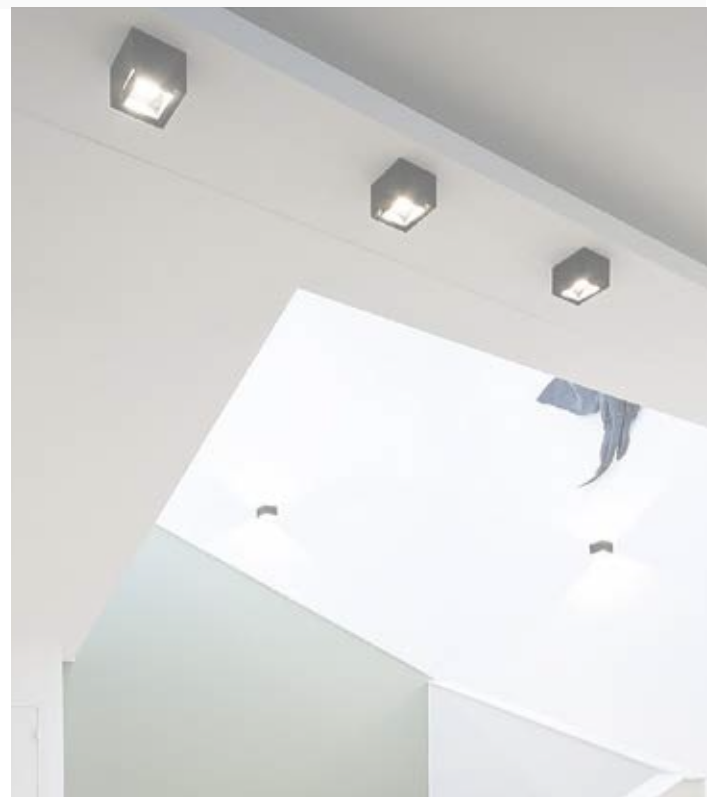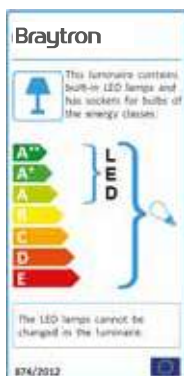

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com





- | | |
|---|--|
| <p>Application</p> <ul style="list-style-type: none"> • Hotels & Office • Restaurants • Shops • Stores & Homes | <p>Features</p> <ul style="list-style-type: none"> • Aluminium Material • Easy installation • Anti Glare Design • Suitable For GU10 Bulbs |
|---|--|



| | |
|------------|--------------|
| ITEM NO | BODY COLOR |
| BH03-05110 | WHITE+BLACK |
| BH03-05116 | BLACK+GOLDEN |

| | |
|-------------------------------|-------------|
| Type | BETA-RR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 100 |

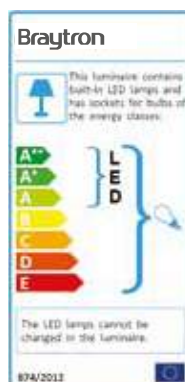

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com






- | | |
|---|--|
| <p>Application</p> <ul style="list-style-type: none"> • Hotels & Office • Restaruants • Shops • Stores & Homes | <p>Features</p> <ul style="list-style-type: none"> • Aluminium Material • Easy installation • Anti Glare Design • Suitable For GU10 Bulbs |
|---|--|



| | |
|------------|-------------|
| ITEM NO | BODY COLOR |
| BH03-05010 | WHITE+BLACK |
| BH03-05011 | BLACK |

| | |
|------------------------|-------------|
| Type | BETA-RR1 |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 100 |

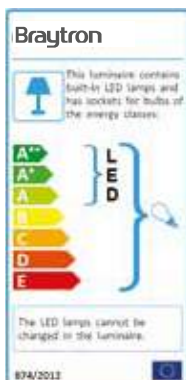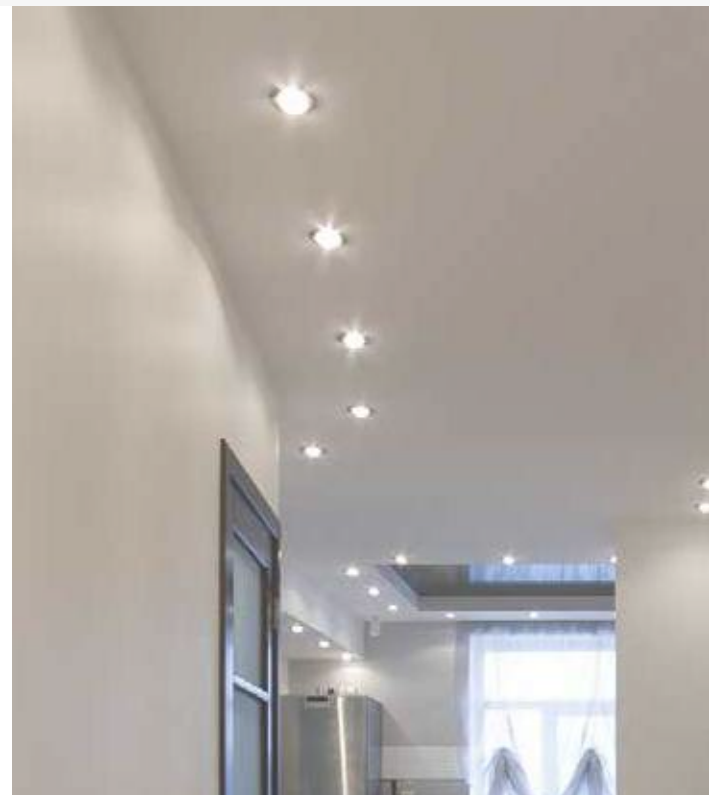

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaurants
- Shops
- Stores & Homes



Features

- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs



| | |
|------------|-------------|
| ITEM NO | BODY COLOR |
| BH03-05020 | WHITE+BLACK |
| BH03-05021 | BLACK |

| | |
|------------------------|-------------|
| Type | BETA-RS1 |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 100 |

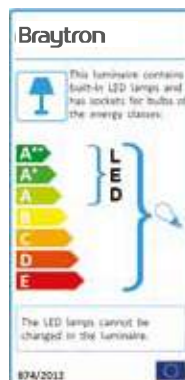

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Hotels & Office
- Restaruants
- Shops
- Stores & Homes

Features



- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs

Suitable for GU10 BULB





| | |
|------------|-------------|
| ITEM NO | BODY COLOR |
| BH03-05030 | WHITE+BLACK |
| BH03-05031 | BLACK |

| | |
|------------------------|-------------|
| Type | BETA-RS2 |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 50 |

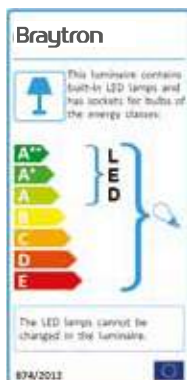

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com




| | |
|-------------------------------|-------------|
| Item No | BH03-04010 |
| Type | TETRA-CR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 90mm |
| Pcs/Carton | 100 |



| | |
|-------------------------------|-------------|
| Item No | BH03-04020 |
| Type | TETRA-CR |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 90x90mm |
| Pcs/Carton | 100 |




Suitable for
GU10 BULB






| | |
|-------------------------------|-------------|
| Item No | BH03-04090 |
| Type | TETRA-CF |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 75mm |
| Pcs/Carton | 100 |



| | |
|-------------------------------|-------------|
| Item No | BH03-04100 |
| Type | TETRA-CF |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 75x75mm |
| Pcs/Carton | 100 |



Braytron

This luminaire contains switchable LED lamps and has sockets for bulbs of the energy classes:

A+ A A C D E

LED

Suitable for GU10 BULB

50mm

The LED lamps cannot be changed in the luminaire.

874/2013






3 YEARS WARRANTY

RoHS 2011/65/EU

IP20

CE ENEC

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

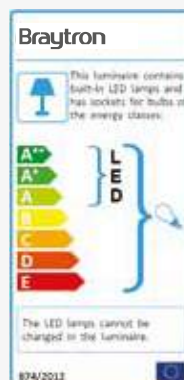


| | |
|-------------------------------|-------------|
| Item No | BH03-04050 |
| Type | TETRA-E |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 70mm |
| Pcs/Carton | 100 |

| | |
|-------------------------------|-------------|
| Item No | BH03-04051 |
| Type | TETRA-E |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 70mm |
| Pcs/Carton | 100 |

| | |
|-------------------------------|-------------|
| Item No | BH03-04040 |
| Type | TETRA-D |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 70mm |
| Pcs/Carton | 100 |




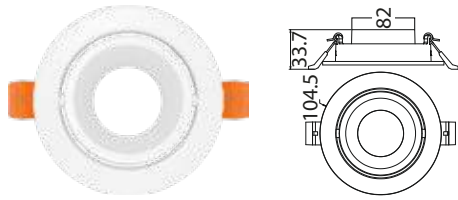


| | |
|-------------------------------|-------------|
| Item No | BH03-04070 |
| Type | TETRA-G |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 104.5mm |
| Pcs/Carton | 100 |




| | |
|-------------------------------|---------------|
| Item No | BH03-04080 |
| Type | TETRA-H |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP20 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 104.5x104.5mm |
| Pcs/Carton | 100 |

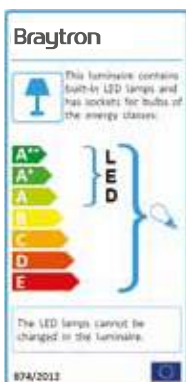


*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | |
|-------------------------------|-------------|
| Item No | BH03-02094 |
| Type | MITTO-IP |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP54 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 75mm |
| Pcs/Carton | 100 |




| | |
|-------------------------------|-------------|
| Item No | BH03-02090 |
| Type | MITTO-IP |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| IP | IP54 |
| Material | Aluminum |
| Environmental Humidity | %5-%70 |
| Cutout | 75mm |
| Pcs/Carton | 100 |


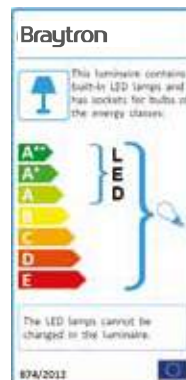


Suitable for
GU10 BULB
50mm







Item No | BH03-00113
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Brushed Silver
 Cutout Size | 78mm
 Pcs/Carton | 100




Item No | BH03-00111
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Black Silver
 Cutout Size | 78mm
 Pcs/Carton | 100




Item No | BH03-00123
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Brushed Silver
 Cutout Size | 78x155mm
 Pcs/Carton | 50

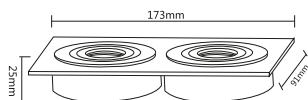


Item No | BH03-00163
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Brushed Silver
 Cutout Size | 78mm
 Pcs/Carton | 100



Item No | BH03-00161
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Black Silver
 Cutout Size | 78mm
 Pcs/Carton | 100




Item No | BH03-00121
 Type | SPOTTI-S
 Socket | GU10/GU5.3
 Material | Aluminum
 Color | Black Silver
 Cutout Size | 78x155mm
 Pcs/Carton | 50

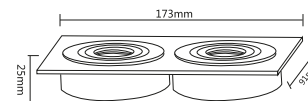


*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




| | |
|-------------|------------|
| Item No | BH03-02070 |
| Type | MITTO-R |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | White |
| Cutout Size | 75mm |
| Pcs/Carton | 200 |




| | |
|-------------|------------|
| Item No | BH03-02074 |
| Type | MITTO-R |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | Nickel |
| Cutout Size | 75mm |
| Pcs/Carton | 200 |




| | |
|-------------|------------|
| Item No | BH03-02040 |
| Type | MITTO-S |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | White |
| Cutout Size | 75mm |
| Pcs/Carton | 200 |




| | |
|-------------|------------|
| Item No | BH03-02044 |
| Type | MITTO-S |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | Nickel |
| Cutout Size | 75mm |
| Pcs/Carton | 200 |



| | |
|-------------|------------|
| Item No | BH03-02060 |
| Type | MITTO-S |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | White |
| Cutout Size | 68mm |
| Pcs/Carton | 200 |



| | |
|-------------|------------|
| Item No | BH03-02064 |
| Type | MITTO-S |
| Socket | GU10/GU5.3 |
| Material | Aluminum |
| Color | Nickel |
| Cutout Size | 68mm |
| Pcs/Carton | 200 |






*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com




ITEM NO | COLOR TEMP
BH07-03000 | 3000K

ITEM NO | COLOR TEMP
BH07-03001 | 3000K

| | | |
|------------------------|-------------|-------------|
| Type | AVVA-WL01 | AVVA-WL01 |
| LED Type | SMD | SMD |
| Body Colour | White | Black |
| Watts | 8W | 8W |
| Luminous | 480lm | 480lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 |

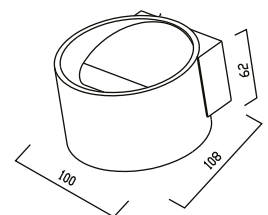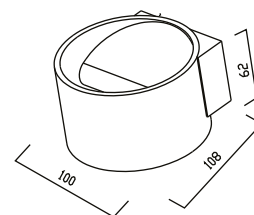




*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

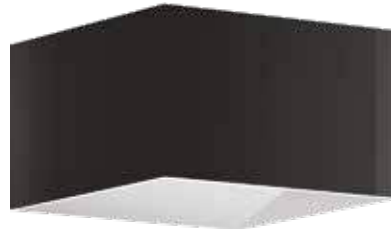

ITEM NO | COLOR TEMP
BH07-03100 | 3000K

ITEM NO | COLOR TEMP
BH07-03101 | 3000K

| | | |
|------------------------|-------------|-------------|
| Type | AVVA-WL01 | AVVA-WL01 |
| LED Type | SMD | SMD |
| Body Colour | White | Black |
| Watts | 8W | 8W |
| Luminous | 480lm | 480lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 |






ITEM NO | COLOR TEMP
BH07-03200 | 3000K

ITEM NO | COLOR TEMP
BH07-03201 | 3000K

| | | |
|-------------------------------|-------------|-------------|
| Type | AVVA-WL03 | AVVA-WL03 |
| LED Type | SMD | SMD |
| Body Colour | White | Black |
| Watts | 8W | 8W |
| Luminous | 480lm | 480lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 |







*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BH07-03300 | 3000K

ITEM NO | COLOR TEMP
BH07-03301 | 3000K

| | | |
|------------------------|-------------|-------------|
| Type | AVVA-WL04 | AVVA-WL04 |
| LED Type | SMD | SMD |
| Body Colour | White | Black |
| Watts | 12W | 12W |
| Luminous | 720lm | 720lm |
| CRI | 80 | 80 |
| Power Factor | >0.55 | >0.55 |
| Beam Angle | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 |

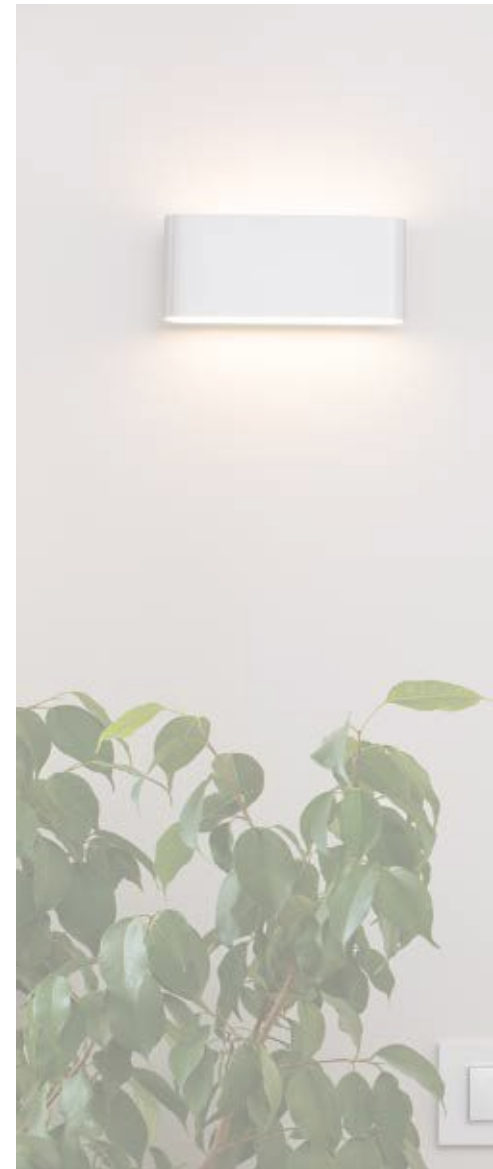

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED GARDEN WALL LAMPS
- LED GARDEN BOLLARD LAMPS
- LED GARDEN SPIKE LAMPS



Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features

- Aluminum Material
- Easy insatallation
- Anti Glare design
- Suitable for GU10 bulbs



Suitable for
GU10 BULB





50mm



| | |
|------------|---------|
| ITEM NO | COLOR |
| BG32-00200 | White |
| BG32-00202 | D. Grey |

| | |
|------------|---------|
| ITEM NO | COLOR |
| BG32-00220 | White |
| BG32-00222 | D. Grey |

| | | |
|------------------------|-------------|-------------|
| Type | RITA-P | RITA-P |
| Model | WL.1 | WL.2 |
| Socket | 1xGU10 | 2xGU10 |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | Glass | Glass |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 24 | 16 |

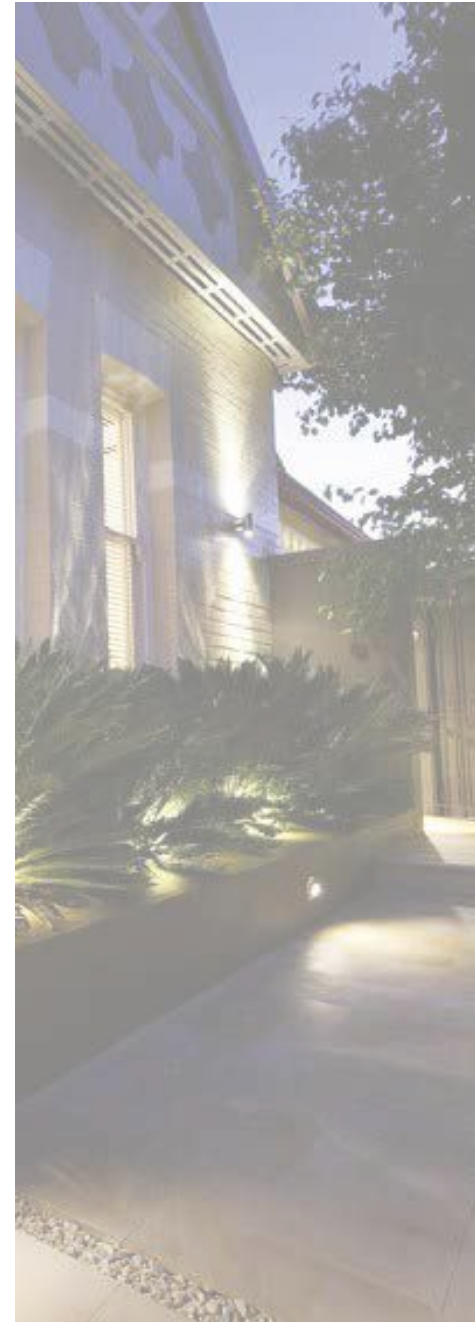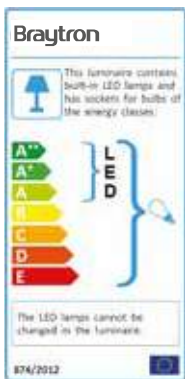

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features




- Aluminum Material
- Easy insatallation
- Anti Glare design



ITEM NO | COLOR TEMP
 BG40-00100 | 3000K-White
 BG40-00102 | 3000K-D. Grey

ITEM NO | COLOR TEMP
 BG40-00200 | 3000K-White
 BG40-00202 | 3000K-D. Grey

| Type | RITA-PL-WL.1 | RITA-PL-WL.2 |
|------------------------|--------------|--------------|
| LED Type | COB | COB |
| Watts | 5W | 2x5W |
| Luminous | 450lm | 900lm |
| CRI | 70 | 70 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 60° | 60° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 24 | 16 |

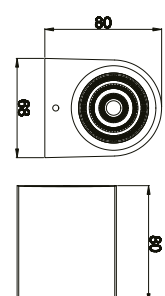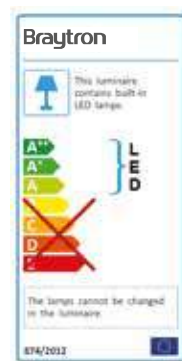

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com


Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features

- Stainless Steel Material
- Easy insatallation
- Anti Glare design
- Suitable for GU10 bulbs

Suitable for
GU10 BULB






ITEM N O | BODY COLOR
BG32-00304 | NICKEL



ITEM N O | BODY COLOR
BG32-00324 | NICKEL




| Type | RITA-S WL.1 | RITA-S EL.2 |
|------------------------|-----------------|-----------------|
| Socket | GU10 | GU10 |
| Max Watt | 35W | 35W |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Stainless Steel | Stainless Steel |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 20 | 20 |

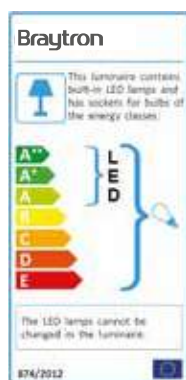



| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BT25-00102 | 3000K |
| BT25-00132 | 6500K |
| BT25-00152 | GREEN |

| | |
|------------------------|-------------|
| Type | SPOTLUX |
| LED Type | COB |
| Body Color | Grey |
| Watts | 9W |
| Luminous | 720lm |
| CRI | 70 |
| Power Factor | >0.5 |
| Beam Angle | 60° |
| Voltage | 220V-240VAC |
| Material | Aluminium |
| Diffuser | Glass |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 20 |

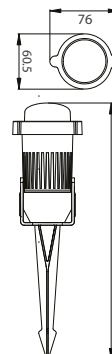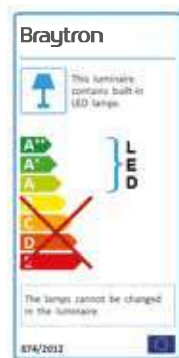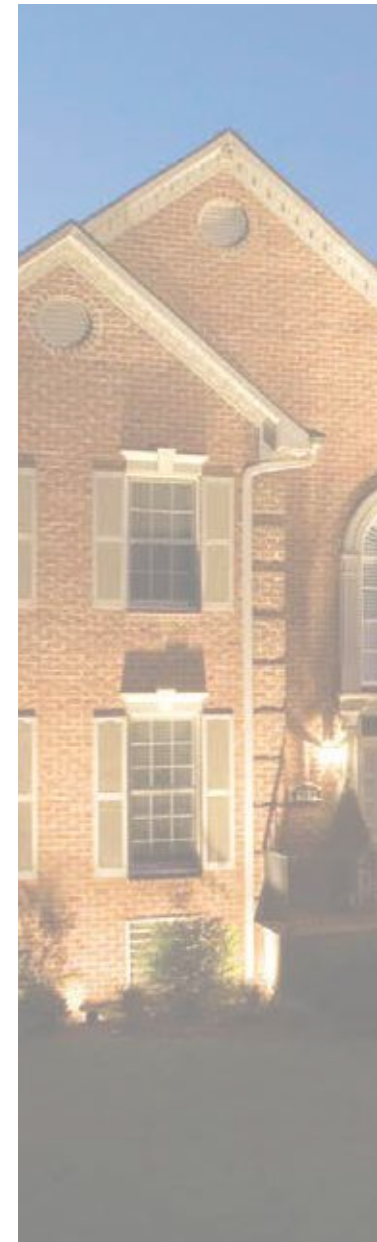

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Application

- Hotels & Offices
- Restaruants
- Shops
- Stores & Homes

Features



- Aluminium Material
- Easy installation
- Anti Glare Design
- Suitable For GU10 Bulbs



ITEM NO | BODY COLOR
BT25-00351 | BLACK

| | |
|------------------------|--------------|
| Type | SPOTLUX-GU10 |
| Socket | GU10 |
| Max Watt | 35W |
| Voltage | 220V-240VAC |
| Material | PC |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 50 |

Suitable for
GU10 BULB
50mm

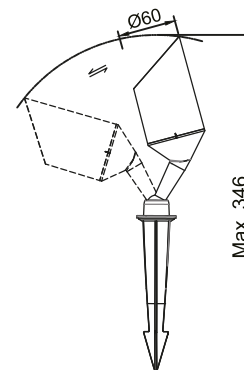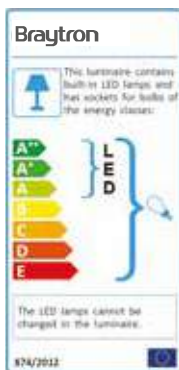



Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features




- Stainless Steel Material
- Easy insatallation
- Anti Glare design



ITEM NO | COLOR TEMP
BG40-00502 | 5000K

ITEM NO | COLOR TEMP
BG40-00602 | 3000K

| Type | PIRUS-S | PIRUS-S2 |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 7W | 10W |
| Luminous | 600lm | 850lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 12 | 8 |

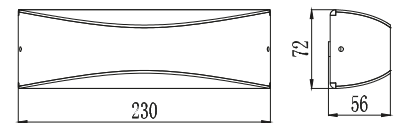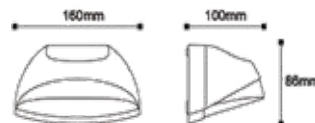

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features


- Stainless Steel Material
- Easy insatallation
- Anti Glare design



ITEM NO | COLOR TEMP
BG40-00702 | 3000K

ITEM NO | COLOR TEMP
BG40-00802 | 3000K

| Type | SIRIUS-A | SIRIUS-2A |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 5W | 10W |
| Luminous | 450lm | 900lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 60° | 60° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | Glass | Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 16 | 16 |

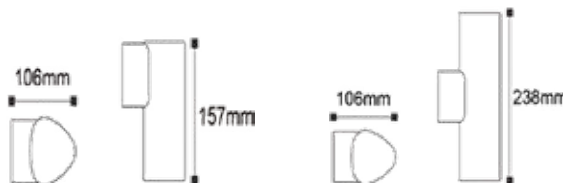

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features

- Stainless Steel Material
- Easy insatallation
- Anti Glare design






ITEM NO | COLOR TEMP
BG40-00902 | 3000K

ITEM NO | COLOR TEMP
BG40-01002 | 3000K

| Type | PIRUS-F | PIRUS-FS |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 10W | 10W |
| Luminous | 850lm | 850lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/ Carton | 12 | 12 |

- Power consumption : 0.45W(static 0.1W)
- Time delay : Min.5sec-Max.5min.(adjustable)
- Detection angle : 120°
- Detection distance : Max.8m (<240)
- Detection speed : 0.6-1.5m/s
- Ambient light : <3-2000lux
- Installation height : 1.8m-3.5m



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Outdoor Walls
- Indoor Walls
- Garden Walls
- Garden Teras

Features



- Stainless Steel Material
- Easy insatallation
- Anti Glare design




ITEM NO | COLOR TEMP
BG43-00902 | 3000K

ITEM NO | COLOR TEMP
BG43-01002 | 3000K

| Type | TARUS-WLA | TARUS-WLS |
|------------------------|-------------|-------------|
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 7W | 7W |
| Luminous | 600lm | 600lm |
| CRI | 80 | 80 |
| Power Factor | >0.5 | >0.5 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 16 | 16 |



- Power consumption : 0.45W(static 0.1W)
- Time delay : Min.5sec->Max.5min.(adjustable)
- Detection angle : 120°
- Detection distance : Max.8m (<240)
- Detection speed : 0.6-1.5m/s
- Ambient light : <3-2000lux
- Installation height : 1.8m-3.5m






ITEM NO | COLOR TEMP
BG43-01102 | 3000K

ITEM NO | COLOR TEMP
BG43-01202 | 3000K

ITEM NO | COLOR TEMP
BG43-01402 | 3000K

| Type | TARUS-300 | TARUS-500 | TARUS-800 |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 7W | 7W | 7W |
| Luminous | 600lm | 600lm | 600lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 9 | 9 | 9 |

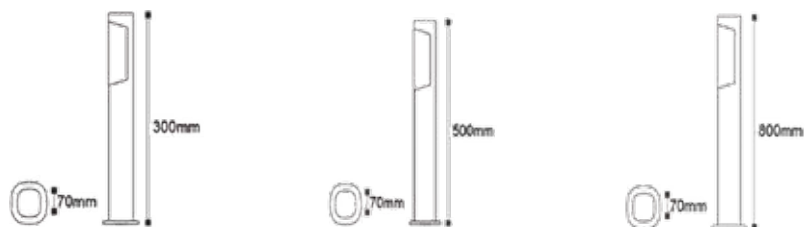


*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | | | | | |
|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
| ITEM NO BG43-02002 | COLOR TEMP 3000K | ITEM NO BG43-02102 | COLOR TEMP 3000K | ITEM NO BG43-02302 | COLOR TEMP 3000K |
|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|

| Type | TARUS-300 | TARUS-500 | TARUS-800 |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 7W | 7W | 7W |
| Luminous | 600lm | 600lm | 600lm |
| CRI | 80 | 80 | 80 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 8 | 4 | 4 |

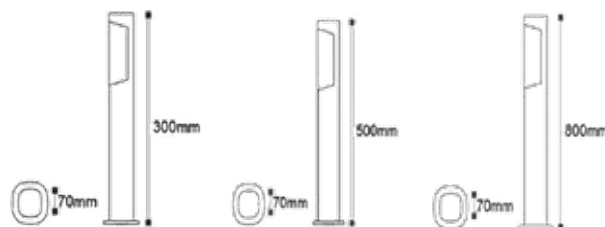

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED HIBAY
- LED FLOODLIGHT
- LED STREET LIGHT

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable for High Ceilings
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 4kv, L to G 2kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Optional Surface Mount-bracket
- Smart design for better heat dissipation
- Low energy consumption

Application

- Warehouses
- High-Ceiling Stores
- Factories
- Logistic Centers








130Lm/w

ITEM NO | COLOR TEMP
BT45-19132 | 6000K

ITEM NO | COLOR TEMP
BT45-19632 | 6000K

| | | |
|------------------------|-------------|-------------|
| Type | HIBAY | HIBAY |
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 100W | 200W |
| Luminous | 13000lm | 26000lm |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 |

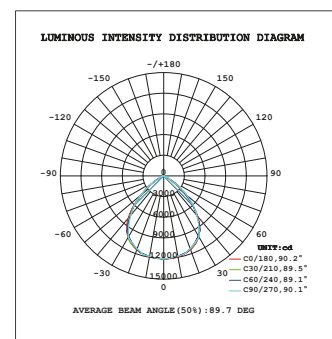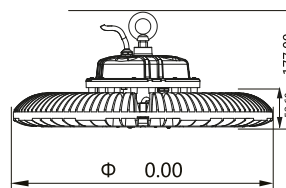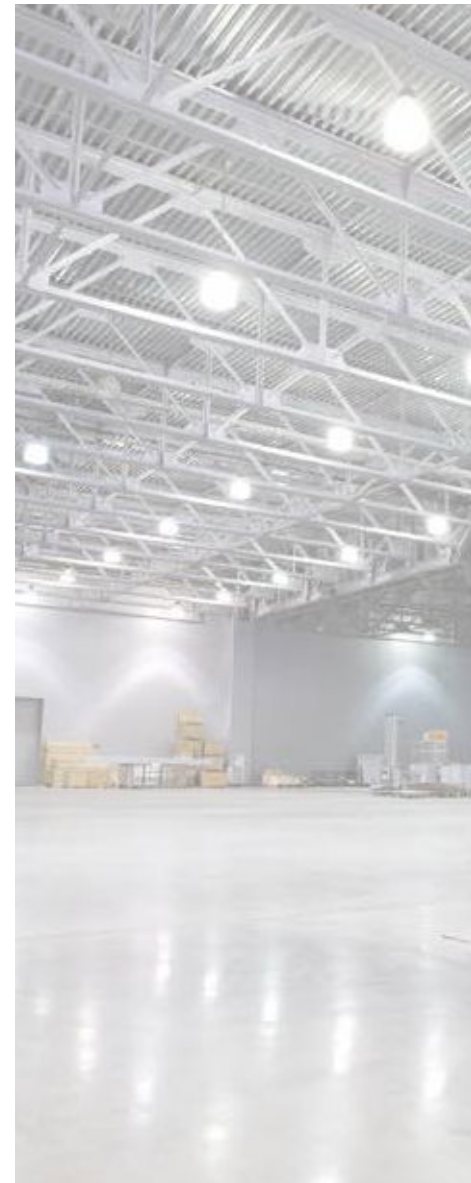

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption



Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas



| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BT61-01002 | 3000K | BT61-02002 | 3000K | BT61-03002 | 3000K | BT61-05002 | 3000K |
| BT61-01032 | 6500K | BT61-02032 | 6500K | BT61-03032 | 6500K | BT61-05032 | 6500K |

| Type | FLOOD-SL | FLOOD-SL | FLOOD-SL | FLOOD-SL |
|------------------------|----------------|----------------|----------------|----------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey | Grey |
| Watts | 10W | 20W | 30W | 50W |
| Luminous | 800lm | 1600lm | 2400lm | 4000lm |
| CRI | 80 | 80 | 80 | 80 |
| Power Factor | >0.9 | >0.9 | >0.9 | >0.9 |
| Beam Angle | 120° | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Diffuser | Tempered Glass | Tempered Glass | Tempered Glass | Tempered Glass |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 36 | 30 | 20 | 12 |

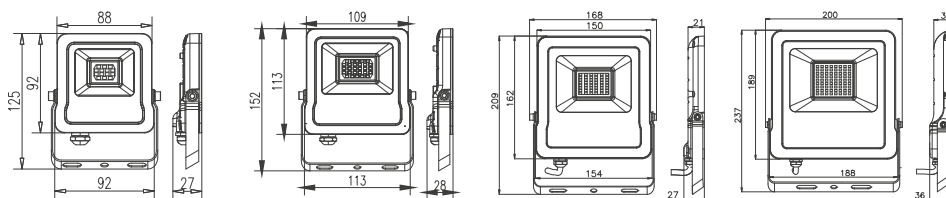

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption



Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas




| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BT61-23002 | 3000K |
| BT61-23032 | 6500K |

| | |
|------------------------|----------------|
| Type | FLOODLED-PL |
| LED Type | SMD |
| Body Colour | Grey |
| Watts | 30W |
| Luminous | 2400lm |
| CRI | 80 |
| Power Factor | >0.9 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Diffuser | Tempered Glass |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 20 |

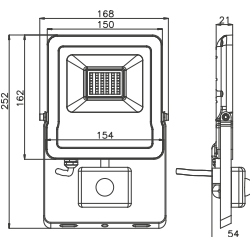

| | |
|---------------------|-----------------------------------|
| Power consumption | : 0.45W(static 0.1W) |
| Time delay | : Min.5sec.-Max.5min.(adjustable) |
| Detection angle | : 120° |
| Detection distance | : Max.8m (<24°C) |
| Detection speed | : 0.6-1.5m/s |
| Ambient light | : <3-2000lux |
| Installation height | : 1.8m-3.5m |

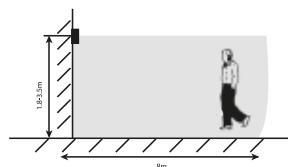

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption

Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas






| ITEM NO | COLOR TEMP |
|------------|------------|
| BT61-09102 | 3000K |
| BT61-09132 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT61-09402 | 3000K |
| BT61-09432 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT61-09602 | 3000K |
| BT61-09632 | 6500K |

| Type | FLOODLED-SL | FLOODLED-SL | FLOODLED-SL |
|------------------------|----------------|----------------|----------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 100W | 150W | 200W |
| Luminous | 8000lm | 12000lm | 16000lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | Tempered Glass | Tempered Glass | Tempered Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 4 | 3 | 2 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption

Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas







| ITEM NO | COLOR TEMP |
|------------|------------|
| BT60-01002 | 3000K |
| BT60-01032 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT60-03002 | 3000K |
| BT60-03032 | 6500K |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BT60-05002 | 3000K |
| BT60-05032 | 6500K |

| Type | FLOOD-SC | FLOOD-SC | FLOOD-SC |
|------------------------|----------------|----------------|----------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 10W | 30W | 50W |
| Luminous | 800lm | 2400lm | 4000lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 120° | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | Tempered Glass | Tempered Glass | Tempered Glass |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 40 | 20 | 10 |

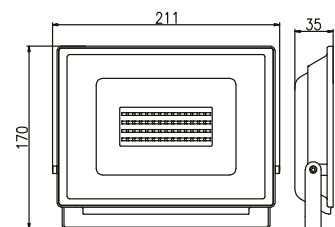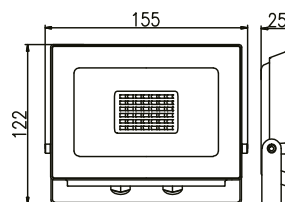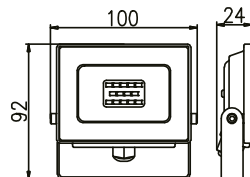

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption




Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas



| | | | |
|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BT60-09102 | 3000K | BT60-09602 | 3000K |
| BT60-09132 | 6500K | BT60-09632 | 6500K |

| Type | FLOOD-SC | FLOOD-SC |
|------------------------|----------------|----------------|
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 100W | 200W |
| Luminous | 8000lm | 16000lm |
| CRI | 70 | 70 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | Tempered Glass | Tempered Glass |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 5 | 3 |

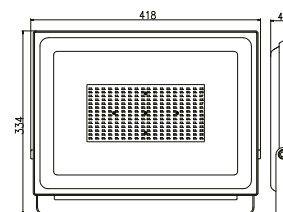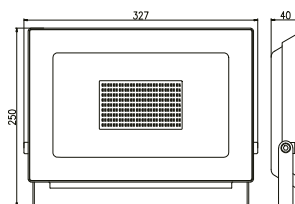

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption



Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas




| ITEM NO | COLOR TEMP |
|------------|------------|
| BT60-25002 | 3000K |
| BT60-25032 | 6500K |

| | |
|------------------------|-----------------|
| Type | FLOOD-SC-SENSOR |
| LED Type | SMD |
| Body Colour | Grey |
| Watts | 50W |
| Luminous | 4000lm |
| CRI | 70 |
| Power Factor | >0.9 |
| Beam Angle | 120° |
| Voltage | 220V-240VAC |
| Material | Aluminum |
| Diffuser | Tempered Glass |
| Driver | Included |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 10 |

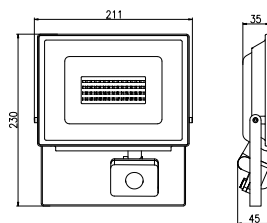

| | |
|---------------------|----------------------------------|
| Power consumption | : 0.45W(static 0.1W) |
| Time delay | : Min.5sec-Max.5min.(adjustable) |
| Detection angle | : 120° |
| Detection distance | : Max.8m (<24°) |
| Detection speed | : 0.6-1.5m/s |
| Ambient light | : <3-2000lux |
| Installation height | : 1.8m-3.5m |

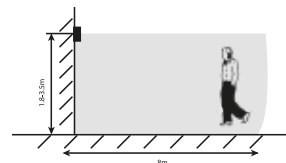


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Application

- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens







Features

- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption

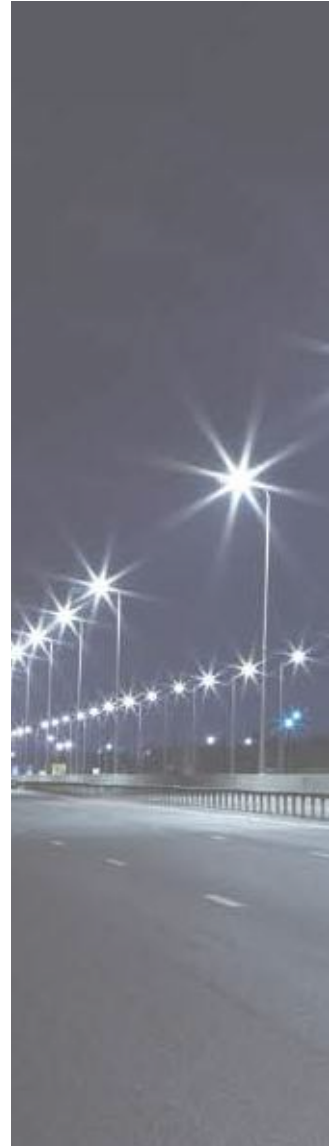

| | | | | | |
|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BT42-03032 | 6000K | BT42-05032 | 6000K | BT42-09132 | 6000K |

| Type | ST81 | ST81 | ST81 |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 30W | 50W | 100W |
| Luminous | 3000lm | 5000lm | 10000lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Beam Angle | 110° | 110° | 110° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 | 1 |

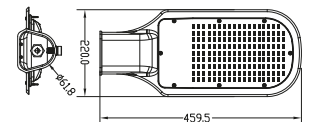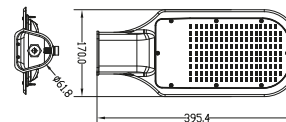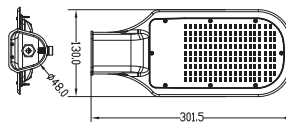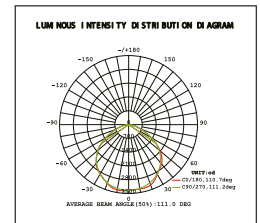

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Application

- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens

Features

- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 4 kv L to G 2kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption

A+ Powered by **SAMSUNG LED**



110Lm/w

ITEM NO
BT42-83032

COLOR TEMP
6000K

ITEM NO
BT42-85032

COLOR TEMP
6000K





ITEM NO
BT42-89132

COLOR TEMP
6000K

| Type | ST83 | ST83 | ST83 |
|------------------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey |
| Watts | 30W | 50W | 100W |
| Luminous | 3300lm | 6600lm | 11000lm |
| CRI | 70 | 70 | 70 |
| Power Factor | >90 | >90 | >90 |
| Beam Angle | 70x140° | 70x140° | 70x140° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum |
| Diffuser | PC | PC | PC |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 | 1 |



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

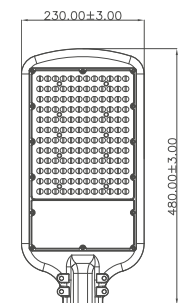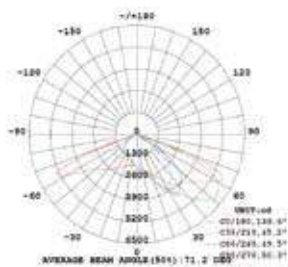

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Powered by PHILIPS

Application

- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens

Features






- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 10kv, L to G 6kv
- IK09 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption



| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
| BT42-53032 | 6000K | BT42-55032 | 6000K | BT42-59132 | 6000K | BT42-59432 | 6000K |

| Type | ST91 | ST91 | ST91 | ST91 |
|------------------------|-------------|-------------|-------------|-------------|
| LED Type | SMD | SMD | SMD | SMD |
| Body Colour | Grey | Grey | Grey | Grey |
| Watts | 30W | 50W | 100W | 150W |
| Luminous | 3900lm | 6500lm | 13000lm | 19500lm |
| CRI | 70 | 70 | 70 | 70 |
| Power Factor | >90 | >90 | >90 | >90 |
| Beam Angle | 70x140° | 70x140° | 70x140° | 70x140° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Diffuser | PC+Glass | PC+Glass | PC+Glass | PC+Glass |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 | 1 | 1 |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

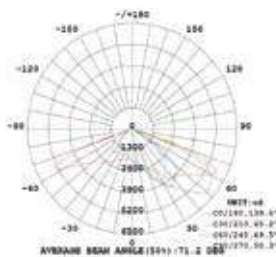

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Application

- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas

Features

- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Smart design for better heat dissipation
- Low energy consumption





ITEM NO | COLOR TEMP
BT40-03032 | 6500K

ITEM NO | COLOR TEMP
BT40-05032 | 6500K

ITEM NO | COLOR TEMP
BT40-08032 | 6500K

ITEM NO | COLOR TEMP
BT40-09132 | 6500K

| | | | | |
|-------------------------------|----------------|----------------|----------------|----------------|
| Type | UFO-S | UFO-S | UFO-S | UFO-S |
| LED Type | COB | COB | COB | COB |
| Body Colour | Grey | Grey | Grey | Grey |
| Watts | 30W | 50W | 80W | 100W |
| Luminous | 3000lm | 5000lm | 8000lm | 10000lm |
| CRI | 70 | 70 | 70 | 70 |
| Power Factor | >0.9 | >0.9 | >0.9 | >0.9 |
| Beam Angle | 90° | 90° | 90° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Diffuser | Tempered Glass | Tempered Glass | Tempered Glass | Tempered Glass |
| Driver | Included | Included | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 | 1 | 1 |

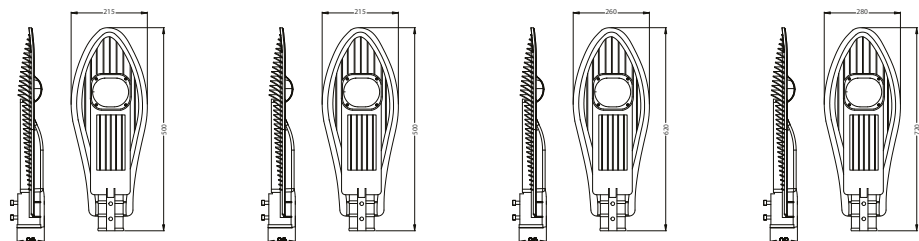




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BT41-03032 | 6000K

ITEM NO | COLOR TEMP
BT41-05032 | 6000K

| | | |
|------------------------|-------------|-------------|
| Type | ST71 | ST71 |
| LED Type | SMD | SMD |
| Body Colour | Grey | Grey |
| Watts | 30W | 200W |
| Luminous | 8000lm | 16000lm |
| CRI | 70 | 70 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum |
| Diffuser | PC | PC |
| Driver | Included | Included |
| Environmental Humidity | %5-%95 | %5-%95 |
| Pcs/Carton | 1 | 1 |

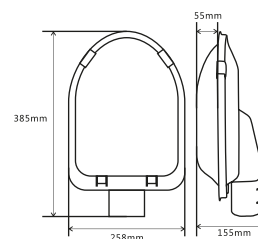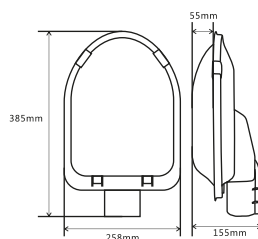


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED INDOOR EMERGENCY EXIT LAMPS
- LED OUTDOOR EMERGENCY EXIT LAMPS
- LED RECHARGABLE LAMPS



Features

- Emergency exit fitting, provided with different kind of pictograms
- Operates in main supply and emergency mode
- Protection against battery discharge
- Equipped with Auto-test function
- Fitting designed to be used with any kind of pictogram
- Smart design provides easy replacement of pictogram
- Fitting is suitable to be used for ceiling and wall
- Designed to be suitable for waterproof and dustproof



PICTOGRAMS

| | |
|------------------------|-----------------------|
| Item No | BC14-01100 |
| Emergency Mode | Non-Maintained |
| LED Type | SMD |
| Body Colour | White |
| Watts | 5W |
| Working Time | 180 minutes |
| Voltage | 220V-240VAC |
| Battery | Lithium 3.2V-1200mAh |
| Charging Time | 24Hours |
| View Distance | 25mt |
| IP | IP65 |
| Class | Class II |
| Material | Non-Flammable Plastic |
| Diffuser | PMMA |
| Driver | Included |
| Operating Temp | "-20+40" |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |

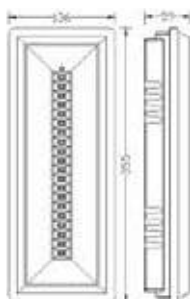


*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features

- Emergency exit fitting, provided with different kind of pictograms
- Operates in main supply and emergency mode
- Protection against battery discharge
- Equipped with Auto-test function
- Fitting designed to be used with any kind of pictogram
- Smart design provides easy replacement of pictogram
- Fitting is suitable to be used for ceiling and wall
- Can be modified for hanging mode usage




| | |
|------------------------|----------------------|
| Item No | BC14-01100 |
| Emergency Mode | Non-Maintained |
| LED Type | SMD |
| Body Colour | White |
| Watts | 2W |
| Working Time | 180 minutes |
| Voltage | 220V-240VAC |
| Battery | 800mAh Ni-CD |
| Charging Time | 24Hours |
| View Distance | 25mt |
| IP | IP20 |
| Class | Class II |
| Material | Non-Flamable Plastic |
| Diffuser | PMMA |
| Driver | Included |
| Operating Temp | "-20+40" |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Features

- Emergency exit fitting, provided with different kind of pictograms
- Operates in main supply and emergency mode
- Protection against battery discharge
- Equipped with Auto-test function
- Fitting designed to be used with any kind of pictogram
- Smart design provides easy replacement of pictogram
- Fitting is suitable to be used for ceiling and wall
- Can be modified for hanging mode usage



| | |
|------------------------|-----------------------|
| Item No | BC14-01120 |
| Emergency Mode | Non-Maintained |
| LED Type | SMD |
| Body Colour | White |
| Watts | 2W |
| Working Time | 180 minutes |
| Voltage | 220V-240VAC |
| Battery | 800mAh Ni-CD |
| Charging Time | 24Hours |
| View Distance | 25mt |
| IP | IP20 |
| Class | Class II |
| Material | Non-Flammable Plastic |
| Diffuser | PMMA |
| Driver | Included |
| Operating Temp | "-20+40" |
| Environmental Humidity | %5-%70 |
| Pcs/Carton | 20 |



BC14-01301



BC14-01302



BC14-01310



BC14-01306



BC14-01304






BC14-01303



BC14-01305



BC14-01307

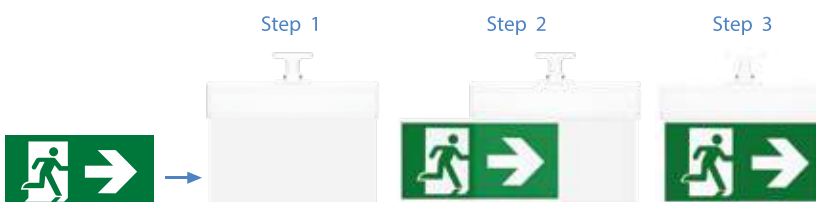

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



1



2



3



4


1

2

3

4

| | 1 | 2 | 3 | 4 |
|-------------------------------|-------------|-------------|-------------|-------------|
| Item No | BC14-00453 | BC14-00553 | BC14-00653 | BC14-00753 |
| Type | WC | DOOR | LEFT-RIGHT | DOWN |
| LED Type | SMD | SMD | SMD | SMD |
| Body Colour | Silver | Silver | Silver | Silver |
| Working Time | 90 Minutes | 90 Minutes | 90 Minutes | 90 Minutes |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Diffuser | Glass | Glass | Glass | Glass |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 | 20 | 20 |

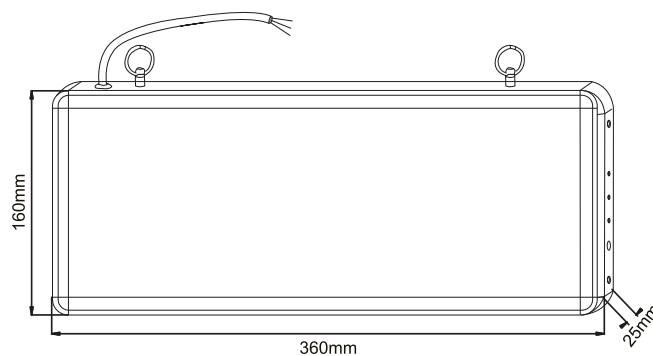


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BC01-00130 | 6500K

ITEM NO | COLOR TEMP
BC01-00330 | 6500K

| | | |
|------------------------|-------------------|-------------------|
| Type | BM30 | BM60 |
| LED Type | SMD | SMD |
| Body Colour | White | White |
| Watts | 2w | 4w |
| LED Qty | 30 LED | 60 LED |
| CRI | 70 | 70 |
| Power Factor | >0.5 | >0.5 |
| Charging Time | 24 hours | 24 hours |
| Working time | 3/7 hours | 3/7 hours |
| Battery | 3.7V1.2AH Lithium | 3.7V2.2AH Lithium |
| Beam Angle | 120° | 120° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | ABS | ABS |
| Diffuser | PS | PS |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 20 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com




ITEM NO | COLOR TEMP
BC02-00130 | 6500K

ITEM NO | COLOR TEMP
BC02-00230 | 6500K

ITEM NO | COLOR TEMP
BC03-00130 | 6500K

| Type | LN010 | LN011 | TR010 |
|------------------------|-------------------|---------------------|-------------------|
| LED Type | SMD | SMD | SMD |
| Body Colour | White+Grey | White+Grey | White+Grey |
| Watts | 3w | 6w | 1w |
| LED Qty | 40 LED | 80 LED | 1 LED |
| CRI | 70 | 70 | 70 |
| Power Factor | >0.5 | >0.5 | >0.5 |
| Charging Time | 24 hours | 24 hours | 24 hours |
| Working time | 3 hours | 3 hours | 5/7 hours |
| Battery | 3.7V1.2AH Lithium | 2x3.7V1.2AH Lithium | 3.7V1.2AH Lithium |
| Beam Angle | 120° | 120° | 90° |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | ABS | ABS | ABS |
| Diffuser | PS | PS | PS |
| Driver | Included | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Cartron | 40 | 20 | 30 |






*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | COLOR TEMP
BC04-00130 | 6500K

ITEM NO | COLOR TEMP
BC04-00230 | 6500K

| | | |
|------------------------|---------------------|---------------------|
| Type | CM010 | CM011 |
| LED Type | SMD | SMD |
| Body Colour | Red+Black | Red+Black |
| Watts | 4w | 8w |
| LED Qty | 25 LED | 48 LED |
| CRI | 70 | 70 |
| Power Factor | >0.5 | >0.5 |
| Charging Time | 24 hours | 24 hours |
| Working time | 3/7 hours | 3/7 hours |
| Battery | 2x3.7V1.2AH Lithium | 2x4V2.4AH Lead Acid |
| Beam Angle | 300° | 300° |
| Voltage | 220V-240VAC | 220V-240VAC |
| Material | ABS | ABS |
| Diffuser | PMMA | PMMA |
| Driver | Included | Included |
| Environmental Humidity | %5-%70 | %5-%70 |
| Pcs/Carton | 20 | 8 |



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



| ITEM NO | COLOR TEMP |
|------------|------------|
| BS01-00100 | 3000K |
| BS01-00103 | 6500K |
| BS01-00104 | RED |
| BS01-00105 | GREEN |
| BS01-00106 | BLUE |

| ITEM NO | COLOR TEMP |
|------------|------------|
| BS01-00200 | 3000K |
| BS01-00203 | 6500K |


| Type | ECOLINE | ECOLINE |
|------------------------|---------|---------|
| LED Type | 3528 | 3528 |
| Watts/mt | 4.8w | 4.8w |
| IP | IP20 | IP20 |
| LED Qty/mt | 60 LED | 60 LED |
| Voltage | 12VDC | 12VDC |
| Environmental Humidity | %5-%70 | %5-%70 |
| Mt/Carton | 250 mt | 250 mt |

| ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP | ITEM NO | COLOR TEMP |
|------------|------------|------------|------------|------------|------------|
| BS01-00300 | 3000K | BS01-00310 | 3000K | BS01-00400 | 3000K |
| BS01-00301 | 4000K | BS01-00311 | 4000K | BS01-00403 | 6500K |
| BS01-00303 | 6500K | BS01-00313 | 6500K | BS01-00409 | RGB |
| BS01-00304 | RED | BS01-00319 | RGB | | |
| BS01-00305 | GREEN | | | | |
| BS01-00306 | BLUE | | | | |
| BS01-00309 | RGB | | | | |

| Type | ECOLINE | ECOLINE | ECOLINE |
|------------------------|---------|---------|---------|
| LED Type | 5050 | 5050 | 5050 |
| Watts/mt | 14.4w | 14.4w | 14.4w |
| IP | IP20 | IP20 | IP54 |
| LED Qty/mt | 60 LED | 60 LED | 60 LED |
| Voltage | 12VDC | 24VDC | 12VDC |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 |
| Mt/Carton | 250 mt | 250 mt | 250 mt |




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

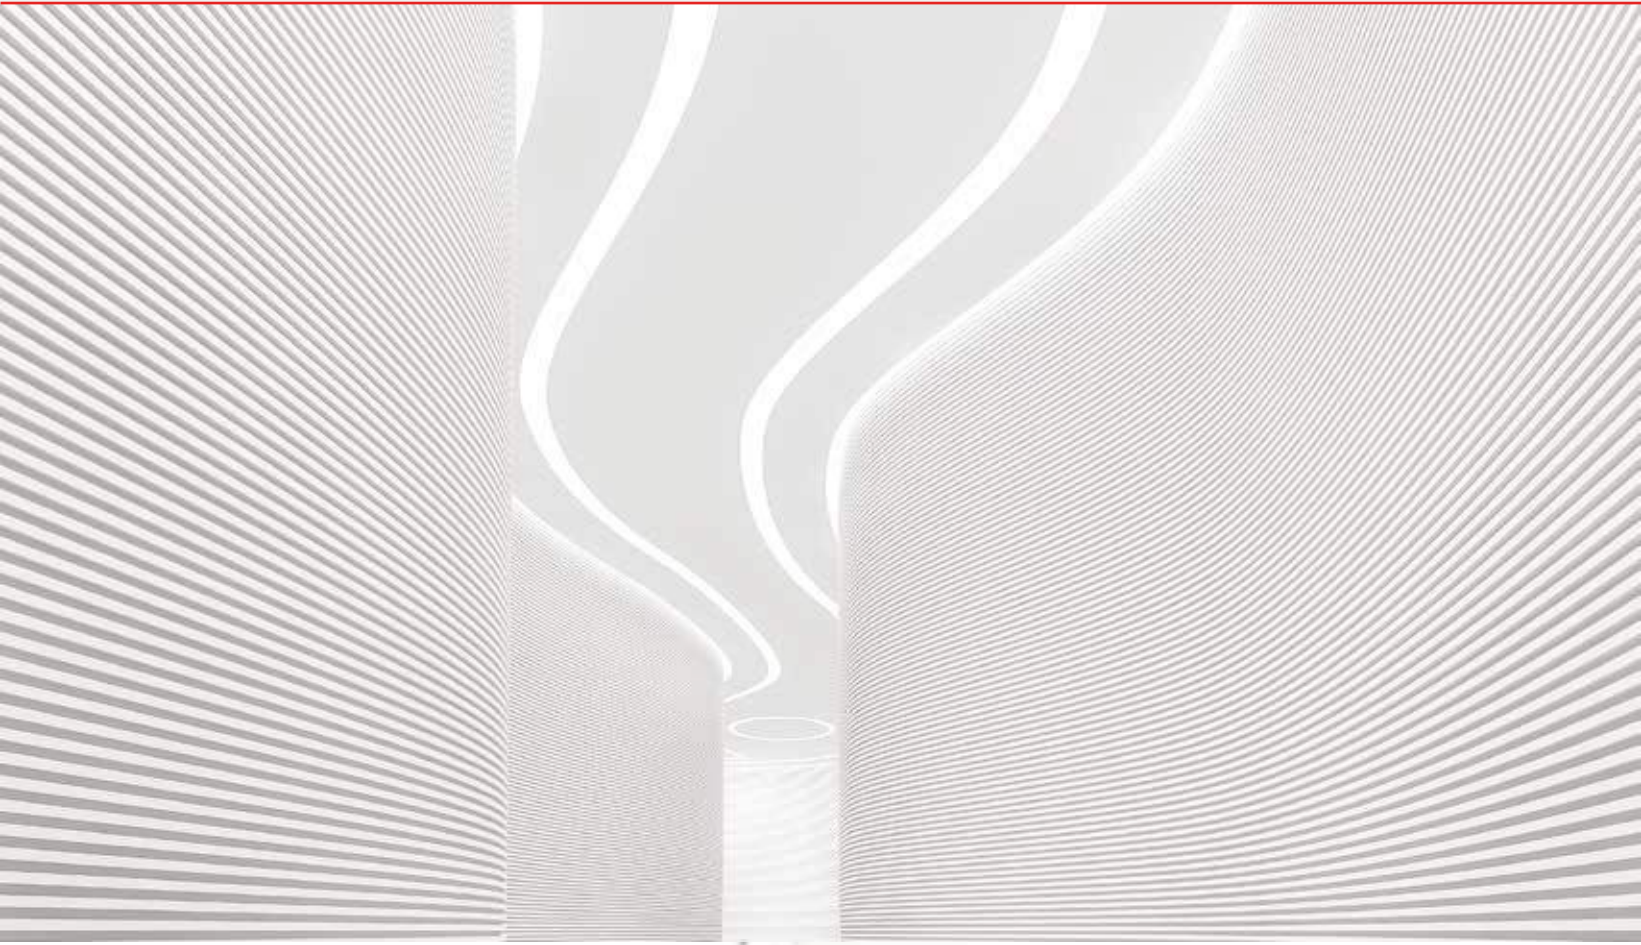

| | |
|------------|------------|
| ITEM NO | COLOR TEMP |
| BS01-00610 | 3000K |
| BS01-00611 | 4000K |

| | |
|------------------------|---------|
| Type | PROLINE |
| LED Type | 2835 |
| Luminous | 2160lm |
| CRI | 80 |
| Watts/mt | 20w |
| IP | IP20 |
| LED Qty/mt | 120LED |
| Voltage | 24VDC |
| Environmental Humidity | %5-%70 |
| Mt/Carton | 100 mt |

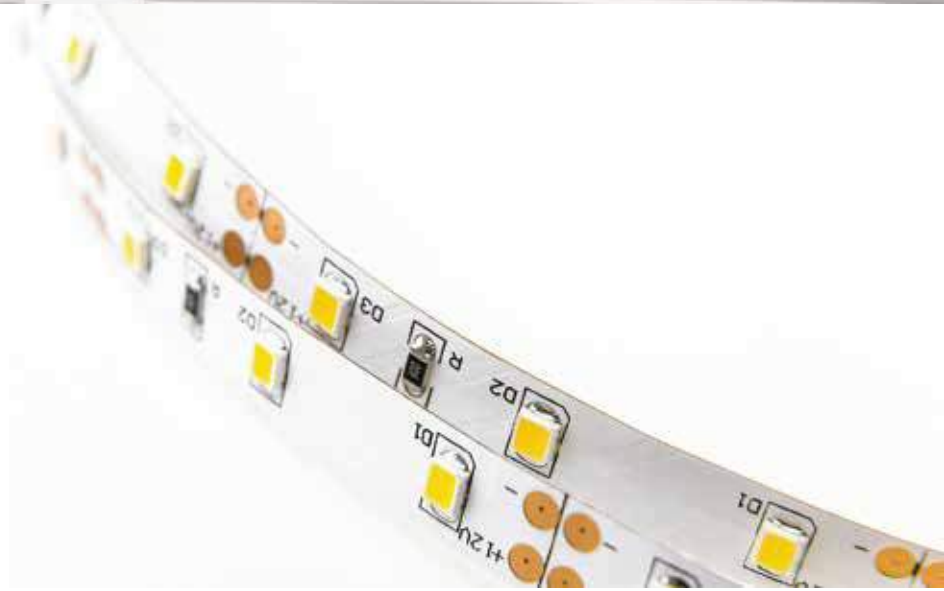

This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire.

Braytron

874/2012

2 YEARS WARRANTY



CE ENEC

LED 0 20,000 HOURS

RoHS COMPLIANT

IP 20

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

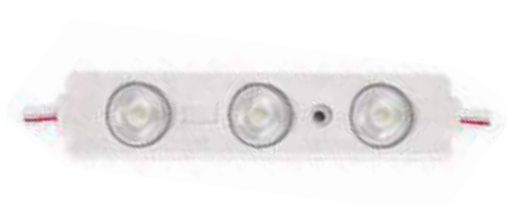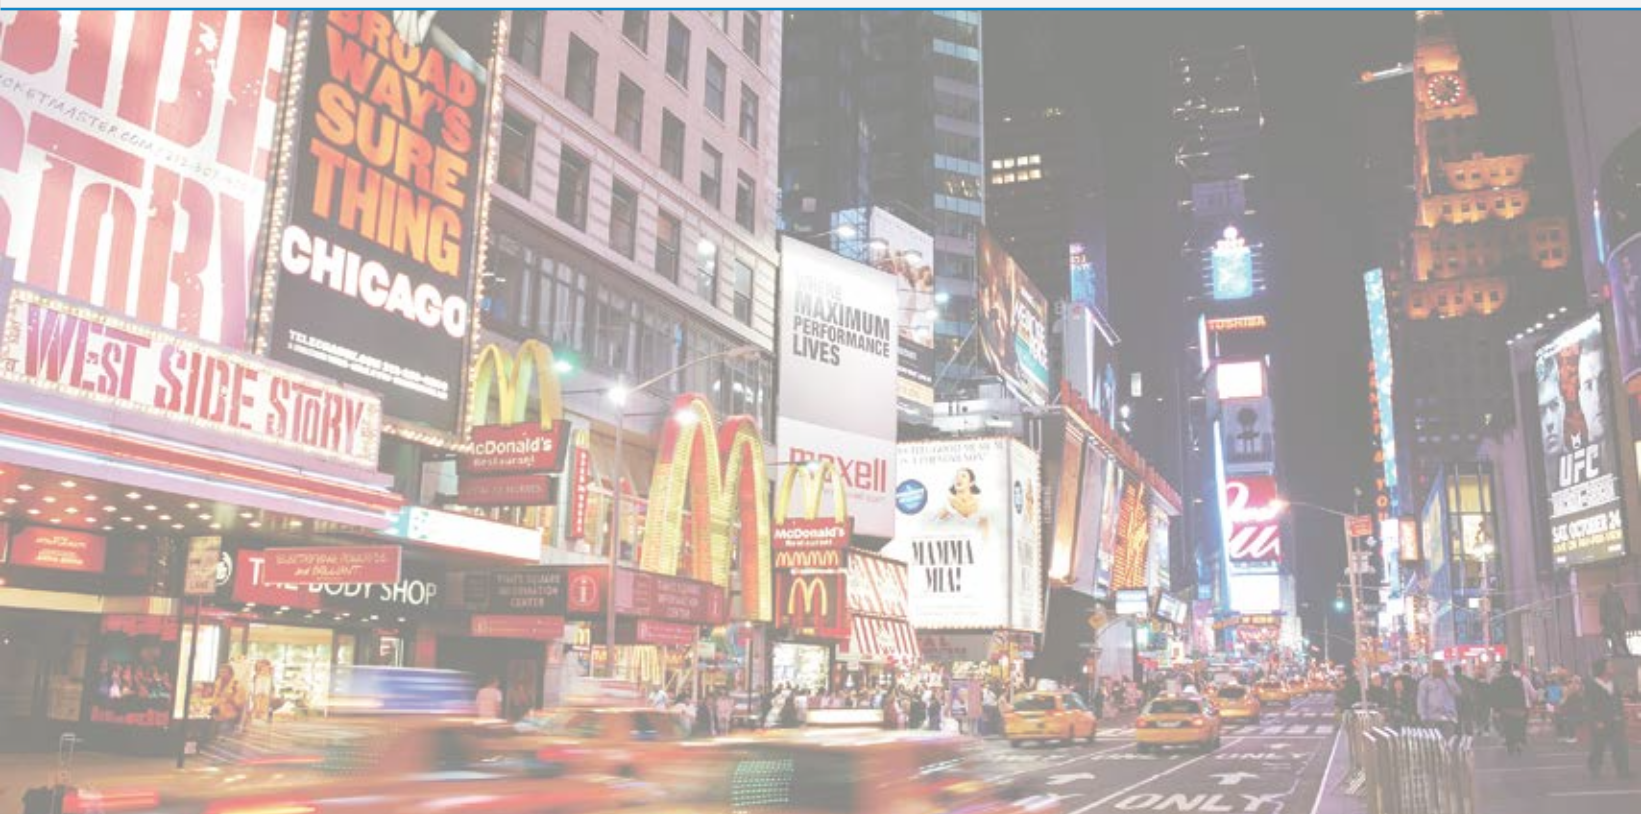


ITEM NO | COLOR TEMP
 BS04-00203 | 6500K
 BS04-00204 | RED
 BS04-00206 | BLUE



ITEM NO | COLOR TEMP
 BS04-00303 | 6500K

| Type | Module |
|------------------------|--------|
| LED Type | 5730 |
| Luminous | 130lm |
| CRI | 70 |
| Watts/Pcs | 1.4w |
| IP | IP65 |
| LED Qty/mt | 3LED |
| Voltage | 12VDC |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 500 |



| Type | Module |
|------------------------|--------|
| LED Type | 3030 |
| Luminous | 130lm |
| CRI | 70 |
| Watts/Pcs | 1.4w |
| IP | IP65 |
| LED Qty/mt | 1LED |
| Voltage | 12VDC |
| Environmental Humidity | %5-%95 |
| Pcs/Carton | 500 |



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



ITEM NO | BY05-60120

ITEM NO | BY05-60180

ITEM NO | BY05-60400

| Type | Dimmable Driver | Dimmable Driver | Dimmable Driver |
|---------------------|--|---|---|
| Dimming Type | Triac | Triac | Triac |
| Material | PC | PC | PC |
| IP | IP20 | IP20 | IP20 |
| Input Voltage | 220-240VAC | 220-240VAC | 220-240VAC |
| Input Power | Max 13.8W | Max 20.6W | Max 42.8W |
| Output Voltage | 20-40VDC | 40-60VDC | 25-42VDC |
| Output Current | 300mA±5% | 300mA±5% | 900mA±5% |
| Output Power | 12W | 18W | 37.8W |
| Power Factor | >0.9 | >0.9 | >0.9 |
| Efficiency | >86% | >86% | >88% |
| Life Time | 20000 Hours | 20000 Hours | 20000 Hours |
| Working Temperature | -20°+40° | -20°+40° | -20°+40° |
| Working Humidity | <93%RH | <93%RH | <93%RH |
| Suitable For Models | BP01-012XX/BP02-012XX BP03-012XX/BP04-012XX | BP01-015XX/BP01-018XX BP02-015XX/BP02-018XX BP03-018XX/BP04-018XX | BP15-366XX/BP16-331XX BP16-366XX/BP16-362XX BP16-466XX/BP16-462XX |
| Pcs/Carton | 50 | 50 | 50 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | | | | | | | |
|-------------------------------|------------|------------|------------|------------|------------|------------|------------|
| Item No | BY02-00250 | BY02-00600 | BY02-01000 | BY02-01500 | BY02-02000 | BY02-02500 | BY02-03500 |
| Watts | 25W | 60W | 100W | 150W | 200W | 250W | 350W |
| Output Voltage | 12VDC | 12VDC | 12VDC | 12VDC | 12VDC | 12VDC | 12VDC |
| Output Current | 2.08A | 5A | 8.3A | 12.5A | 16.5A | 20.8A | 29.1A |
| Power Factor | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 |
| Voltage | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V |
| Material | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum |
| IP | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Dimensions(mm) | 32x78x112 | 32x40x160 | 34x47x187 | 34x47x187 | 40x55x200 | 41x55x223 | 41x55x223 |
| Pcs/Carton | 60 | 60 | 60 | 60 | 40 | 40 | 40 |


| | | | | | | | |
|-------------------------------|------------|------------|------------|------------|------------|------------|------------|
| Item No | BY02-10250 | BY02-10600 | BY02-11000 | BY02-11500 | BY02-12000 | BY02-12500 | BY02-13500 |
| Watts | 25W | 60W | 100W | 150W | 200W | 250W | 350W |
| Output Voltage | 24VDC | 24VDC | 24VDC | 24VDC | 24VDC | 24VDC | 24VDC |
| Output Current | 1.04A | 2.5A | 4.15A | 6.25A | 8.25A | 10.4A | 14.55A |
| Power Factor | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 | >0.6 |
| Voltage | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V | 220-240 V |
| Material | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum |
| IP | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Dimensions(mm) | 32x78x112 | 32x40x160 | 34x47x187 | 34x47x187 | 40x55x200 | 41x55x223 | 41x55x223 |
| Pcs/Carton | 60 | 60 | 60 | 60 | 40 | 40 | 40 |



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




| | | | | |
|-------------------------------|-------------|-------------|-------------|-------------|
| Item No | BY30-01010 | BY30-01110 | BY30-01120 | BY30-01130 |
| Type | Amplifier | Controller | Controller | Controller |
| Watts | 144W | 180W | 216W | 72W |
| Output Current | 12A | 15A | 18A | 6A |
| Output Voltage | 12VDC | 12VDC | 12VDC/24VDC | 12VDC |
| Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Material | Aluminum | Aluminum | Aluminum | Plastic |
| Environmental Humidity | %5-%70 | %5-%70 | %5-%70 | %5-%70 |
| Pcs/Carton | 100 | 50 | 50 | 10 |

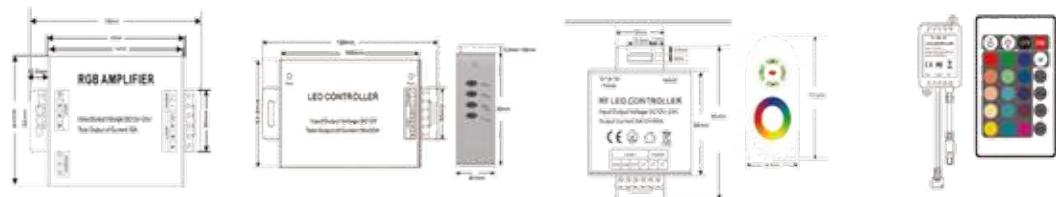

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com





| Item No | BY31-01030 | BY31-01010 | BY31-01040 |
|---------------------|------------------------|------------------------|------------------------|
| Type | MS03 | MS01 | MS04 |
| Sensor Type | PIR | PIR | PIR |
| IP | IP44 | IP20 | IP20 |
| Input Voltage | 220V-240VAC | 220V-240VAC | 220V-240VAC |
| Rated Load | 800W(Halogen) | 2000W(Halogen) | 800W(Halogen) |
| Rated Load | 150W(CFL) | 500W(CFL) | 150W(CFL) |
| Rated Load | 250W(LED) | 1000W(LED) | 250W(LED) |
| Power Consumption | 0.45W(Static 0.1W) | 0.45W(Static 0.1W) | 0.45W(Static 0.1W) |
| Time Delay | 5sec.-8min(Adjustable) | 7sec.-8min(Adjustable) | 5sec.-5min(Adjustable) |
| Detection Angle | 180° | 360° | 360° |
| Detection Distance | 16mt max 24° | 16mt max 24° | 6mt max 24° |
| Detection Speed | 0.6-1.5m/S | 0.6-1.5m/S | 0.6-1.5m/S |
| Ambient Light | 5-2000LUX | 5-2000LUX | 5-2000LUX |
| Installation Height | 1.8-3.5mt | 2-4mt | 2-4mt |
| Working Temperature | -20+40° | -20+40° | -20+40° |
| Working Humidity | 93%RH | 93%RH | 93%RH |
| Material | PC | PC | PC |
| Pcs/Carton | 50 | 50 | 100 |

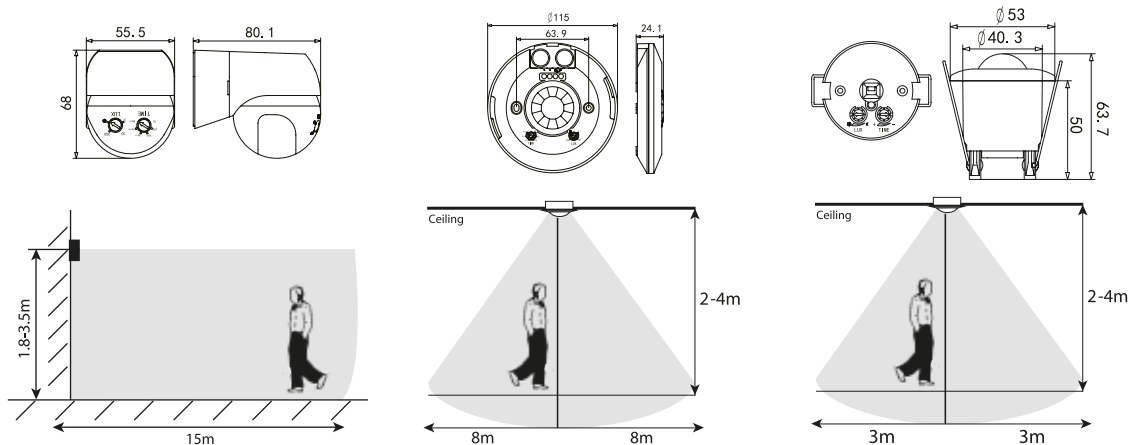

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| Item No | BY31-03010 | BY31-03040 |
|-----------------------------|------------|------------|
| Type | PS01 | PS02 |
| Input Power | 220-240AC | 220-240AC |
| Rated Load | Max. 1000W | Max. 3000W |
| Amper | 6A | 25A |
| Ambient Light | <5-50lux | <5-100lux |
| Electrical Protection Class | Class II | Class II |
| Protection Degree | IP44 | IP44 |
| Working Temp | -20°/+40° | -20°/+40° |
| Working Humidity | <%93RH | <%93RH |
| Material | Plastic | Plastic |
| Pcs/Carton | 100 | 100 |

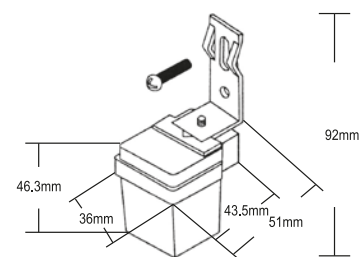

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | BODY COLOR | ITEM NO | BODY COLOR | ITEM NO | BODY COLOR | ITEM NO | BODY COLOR |
| BY40-00110 | WHITE | BY40-00120 | WHITE | BY40-00210 | WHITE | BY40-00220 | WHITE |
| BY40-00111 | BLACK | BY40-00121 | BLACK | BY40-00211 | BLACK | BY40-00221 | BLACK |

| | | | | |
|-------------------|----------|----------|----------|----------|
| Type | 2-WIRES | 2-WIRES | 4-WIRES | 4-WIRES |
| Length | 1 mt | 2 mt | 1 mt | 2 mt |
| Wire | Copper | Copper | Copper | Copper |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Pcs/Carton | 20 | 20 | 20 | 20 |



| | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|
| ITEM NO | BODY COLOR | ITEM NO | BODY COLOR | ITEM NO | BODY COLOR | ITEM NO | BODY COLOR |
| BY40-00230 | WHITE | BY40-00240 | WHITE | BY40-00330 | WHITE | BY40-00340 | WHITE |
| BY40-00231 | BLACK | BY40-00241 | BLACK | BY40-00331 | BLACK | BY40-00341 | BLACK |

| | | | | |
|-------------------|-----------|----------------|-----------|----------------|
| Type | L-2-WIRES | Middle-2-WIRES | L-4-WIRES | Middle-4-WIRES |
| Wire | Copper | Copper | Copper | Copper |
| Material | Aluminum | Aluminum | Aluminum | Aluminum |
| Pcs/Carton | 250 | 250 | 250 | 250 |



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



| | | | | | | |
|-------------------|------------|------------|------------|------------|------------|------------|
| Item No | BY45-00100 | BY45-00101 | BY45-00102 | BY45-00103 | BY45-00104 | BY45-00200 |
| Socket | E27 | E27 | E27 | E27 | E27 | E27 |
| Color | White | Black | Red | Green | Blue | Coffee |
| Length | 1 mt | 1 mt | 1 mt | 1 mt | 1 mt | 1 mt |
| Material | Plastic | Plastic | Plastic | Plastic | Plastic | Plastic |
| Pcs/Carton | 100 | 100 | 100 | 100 | 100 | 100 |

| | |
|-------------------|------------|
| Item No | BY45-00201 |
| Socket | E27 |
| Color | Copper |
| Length | 1 mt |
| Material | Iron |
| Pcs/Carton | 100 |



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



| | | | | | | | |
|-----------------------|------------|------------|------------|------------|------------|------------|------------|
| Item No | BY90-00110 | BY90-00111 | BY90-00112 | BY90-00114 | BY90-00115 | BY90-00116 | BY90-00117 |
| Color | White | Black | Grey | Red | Green | Blue | Yellow |
| Size | 20 Yards | 20 Yards | 20 Yards | 20 Yards | 20 Yards | 20 Yards | 20 Yards |
| Material | PVC | PVC | PVC | PVC | PVC | PVC | PVC |
| Dimensions(mm) | 0.13x19mm | 0.13x19mm | 0.13x19mm | 0.13x19mm | 0.13x19mm | 0.13x19mm | 0.13x19mm |
| Pcs/Carton | 200 | 200 | 200 | 200 | 200 | 200 | 200 |



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Braytron

lighting expert

Lighting expert Aydınlatma uzmanı Lichtspezialisten
Expertul in iluminare Experti i ndricimit Expert en éclairage
Verlichting expert Expertos en iluminación Esperto di illuminazione
эксперт в освещении Експертът в осветлението
ειδίκοι στον φωτισμό Stručnjak za rasvjetu Осветлен експерт

